



SMP5PM-CTX Supervised Power Supply/Charger

Overview:

The SMP5PM-CTX is a power limited supply/chargers that will convert a 115 VAC / 60Hz input, into a 12VDC or 24VDC power limited output, with 4 amps of continuous supply current (see specifications).

Specifications:

- Switch selectable 12VDC or 24VDC.
- Input 115VAC / 60Hz, .95 amp.
- Maximum charge current .5 amp.
- 4 amps continuous supply current at 12VDC or 24VDC.
- Filtered and electronically regulated outputs.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails (zero voltage drop).
- AC input and DC output LED indicators.
- AC fail supervision (form "C" contacts).
- Low battery supervision (form "C" contact).
- Short circuit and thermal overload protection.
- Unit is complete with power supply, enclosure and cam lock.
- Includes battery leads.

Specified at 25° C ambient.

SMP5PM-CTX Enclosure Dimensions: 15.5”H x 12”W x 4.5”D (cam lock included)

Note: Enclosure accommodates up to two (2) 12AH batteries

Power Supply Voltage Output Specifications: *

Output VDC	Switch Position	Max. Load DC
12VDC	SW 1 - Closed	4 amps
24VDC	SW1 - Open	4 amps

Installation Instructions:

The SMP5PM-CTX should be installed in accordance with The National Electrical Code and all applicable Local Regulations.


1. Mount the SMP5PM-CTX in desired location.
2. Set the SMP5PM-CTX to desired DC output voltage via SW1 (see power supply voltage output selection chart).
3. Connect AC power to terminals marked [L & N], connect ground to terminal marked [G].
Use 18 AWG or larger for all power connections (Battery, DC output).
Use 22 AWG to 18 AWG for power limited circuits (AC Fail/Low Battery reporting).
Keep power limited wiring separate from non-power limited wiring (115VAC / 60Hz Input, Battery Wires). Minimum .25” spacing must be provided.
4. Connect devices to be powered to terminals marked [+ DC -].
Note: It is good operating practice to measure and verify output voltage before connecting devices to ensure proper operation of equipment.
***Note:** Power switch is used to turn off DC output voltage. It disconnects the L (HOT) terminal from the rest of the board. When servicing the unit, AC mains should be removed.
5. When the use of stand-by batteries are desired, they must be lead acid or gel type.
Connect battery to terminals marked [- BAT +] (battery leads included).
Use two (2) 12VDC batteries connected in series for 24VDC operation.
Note: When batteries are not used a loss of AC will result in the loss of output voltage.
6. Connect appropriate signaling notification devices to AC Fail & Low battery supervisory relay outputs marked [N.C., C, N.O.].

LED Diagnostics:

Red (DC)	Green (AC)	Power Supply Status
ON	ON	Normal operating condition.
ON	OFF	Loss of AC, Stand-by battery supplying power.
OFF	ON	No DC output
OFF	OFF	Loss of AC. Discharge or no stand-by battery. No DC output.

Terminal Identification:

Terminal Legend	Function/Description
L, G, N	Connect 115 VAC to these terminals: L to Hot, N to Neutral, G to ground.
+ DC -	12 / 24VDC - 4 amps continuous power limited output.
AC FAIL N.O., C, N.C.	Used to notify loss of AC power, e.g. connect to audible device or alarm panel. Relay normally energized when AC power is present. Contact rating 1amp @ 120VAC / 28VDC
Low Battery NO, C, NC	Used to indicate low battery condition, e.g. connect to alarm panel. N.O., C, N.C. Relay normally energized when DC power is present. Contact rating 1 amp @ 120VAC / 28VDC Low battery threshold: 12VDC output threshold set @ approximately 10.5VDC, 24VDC output threshold set @ approximately 21VDC.
- BAT +	Stand-by battery connections. Maximum charge rate .5 amp.

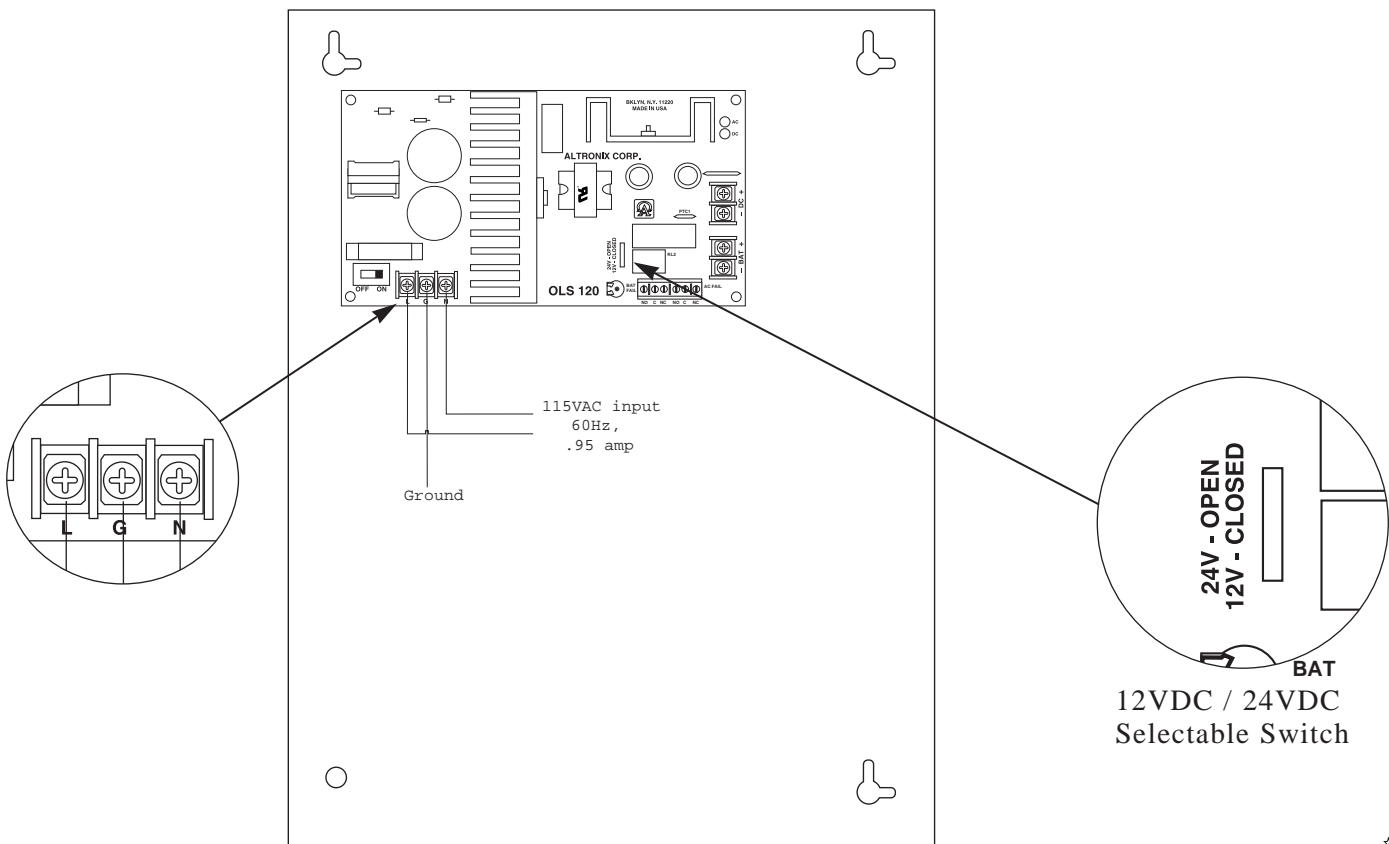

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.



Altronix Corp.

140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056

web site: www.altronix.com, e-mail: info@altronix.com, Lifetime Warranty, Made in U.S.A.