




## INSTALLATION INSTRUCTIONS

### Introduction

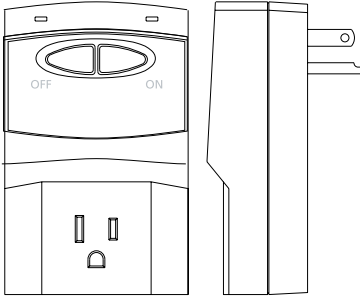

The HS-LM7500 is a CEBus-compliant On/Off Dimmer module that plugs into a standard 120VAC residential electrical outlet for remote and manual control of incandescent lamps rated up to 300 watts maximum. Remote control uses CEBus spread spectrum powerline communications protocol. The connected lamp may be turned on or off using the switch on the lamp or the buttons on the module. Advanced load-sensing circuitry turns on the lamp when the lamp is connected to the module. The HS-LM7500 also supports directed address acquisition for Home Plug-and-Play installations.

### Enrolling for CEBus® Operation

The HS-LM7500 module must be enrolled with an HS-HC8500 Series Programming Kit for CEBus operation with an HS-HC8000 Series CEBus Controller. For additional information, please refer to the Instructions included with the HS-HC8000 Series CEBus Controller and the HS-HC8500 Series Programming Kit software.

**Important:** When moving the module to a new location or installation, the module must be reset to factory defaults.

1. Plug the HS-LM7500 into a 120VAC residential power outlet.
2. Select ADD a module in the HS-HC8500 Series programming software and follow the on-screen instructions.
3. When prompted, press and hold both the ON and OFF button for 8 seconds. The LED on the left will flash rapidly.
4. Release both the ON and OFF buttons.
5. Tap the OFF button; the LED on the left will flash slowly. The module will now communicate with the HS-HC8000 Series Controller and acquire a device address.
6. When the device address is acquired, the LED will turn off.

For information on programming schedules, dimmer light level and other features, please refer to the *Installation Instructions* included with the home automation module (Escort, VPM) and with the HS-HC8500 Series Programming Kit software.

### Resetting to Factory Default Settings

1. Plug the HS-LM7500 into a 120VAC residential power outlet.
2. Press and hold both the ON and OFF button for 8 seconds. The LED on the left will flash rapidly.
3. Release both the ON and OFF buttons.
4. Press and hold both the ON and OFF button for 8 seconds. The LED on the left will flash slowly.
5. Release both the ON and OFF buttons. The HS-LM7500 is now reset to the factory default settings.

# Manual Operation

1. To turn the light on, tap the ON button.
2. To increase the brightness of the light, press and hold the ON button.
3. To turn the light off, tap the OFF button.
4. To reduce the brightness of the light, press and hold the OFF button.

## Specifications

Supply Voltage: . . . . . 120VAC  $\pm$  10%, 60Hz  
Output Load: . . . . . 300W max. incandescent lamp load  
Operating Temperature: . . . . . -20°C to 40°C, non-condensing humidity  
Controls: . . . . . 2 Push buttons - ON/dimmer up, OFF/dimmer down  
Indicators: . . . . . 2 Green LEDs – ON/OFF, Configuration  
Communications: . . . . . CEBus Powerline (EIA-600), HomePnP  
Approvals: . . . . . UL, ULC, and FCC Part 15

**Caution: Do NOT exceed the electrical ratings listed here.**

CEBus® is a registered trademark of EIA.

## Warranty

Digital Security Controls Ltd. warrants that for a period of 12 months from the date of purchase, the product shall be free of defects in materials and workmanship under normal use and that in fulfillment of any breach of such warranty, Digital Security Controls Ltd. shall, at its option, repair or replace the defective equipment upon return of the equipment to its repair depot. This warranty applies only to defects in parts and workmanship and not to damage incurred in shipping or handling, or damage due to causes beyond the control of Digital Security Controls Ltd. such as lightning, excessive voltage, mechanical shock, water damage, or damage arising out of abuse, alteration or improper application of the equipment.

The foregoing warranty shall apply only to the original purchaser, and is and shall be in lieu of any and all other warranties, whether expressed or implied and of all other obligations or liabilities on the part of Digital Security Controls Ltd. Digital Security Controls Ltd. neither assumes responsibility for, nor authorizes any other person purporting to act on its behalf to modify or to change this warranty, nor to assume for it any other warranty or liability concerning this product.

In no event shall Digital Security Controls Ltd. be liable for any direct, indirect or consequential damages, loss of anticipated profits, loss of time or any other losses incurred by the buyer in connection with the purchase, installation or operation or failure of this product.

**WARNING: Digital Security Controls Ltd. recommends that the entire system be completely tested on a regular basis. However, despite frequent testing, and due to, but not limited to, criminal tampering or electrical disruption, it is possible for this product to fail to perform as expected**

**IMPORTANT INFORMATION: Changes or modifications not expressly approved by Digital Security Controls Ltd. could void the user's authority to operate this equipment.**

## FCC Compliance Statement

**CAUTION:** Changes or modifications not expressly approved by Digital Security Controls Ltd. could void your authority to use this equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the Instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The user may find the following booklet prepared by the FCC useful: "How to Identify and Resolve Radio/Television Interference Problems". This booklet is available from the U.S. Government Printing Office, Washington D. C. 20402, Stock # 004-000-00345-4. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



DSC® Home Systems is a division of Digital Security Controls Ltd.

©2001 Digital Security Controls Ltd., Toronto, Canada

1-800-387-3630 • [www.dsc.com](http://www.dsc.com)

Printed in Canada 29005889 R002