



Intercom/Door Station Mounting Instructions


The Communiqué internal intercom station has a handsfree microphone and speaker so that two-way communication can occur throughout the premises. The door station can be mounted at any entrance point, acting as a doorbell which can also facilitate two-way communication with anyone inside the premises. For more information regarding the functions and operation of the intercom and door stations, please consult your Communiqué Operation Manual.

Mounting the Intercom / Door Station

The intercom and door station units are housed in the same plastics and the mounting instructions for the both units are exactly the same. To mount the units, perform the following:

1. Loosen the screw on the bottom of the unit and separate the backplate and mounting plate from the main unit.
2. Feed the station wire through the large square holes in the backplate and mounting plate. Connect the four conductors from the wall to the four wires attached to the circuit board: connect red to red, black to black, yellow to yellow and green to green.
3. Fasten the backplate and the mounting plate to the wall with screws through the large oval shaped holes in the plates.
4. Fasten the front portion of the unit to the backplate and tighten the bottom screw to secure it into place.
5. For programming instructions and Communiqué Wiring Diagram, please see your Installation and Operation Manuals.

Consult the Intercom/Door Station mounting diagram below:

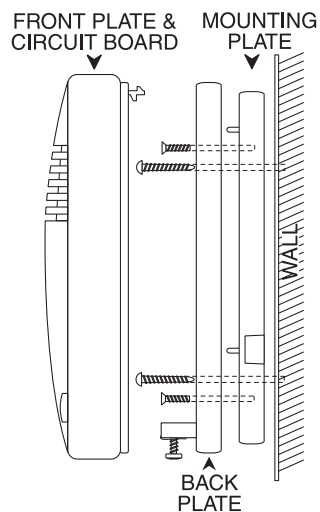

WARNING: Please refer to the System Installation Manual for information on limitations regarding product use and function and information on the limitations as to liability of the manufacturer.

FCC COMPLIANCE STATEMENT

CAUTION: Changes or modifications not expressly approved by Digital Security Products Ltd. could void your authority to use this equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

The user may find the following booklet prepared by the FCC useful: "How to Identify and Resolve Radio/Television Interference Problems". This booklet is available from the U.S. Government Printing Office, Washington D.C. 20402, Stock # 004-000-00345-4.



©1997 Digital Security Controls Ltd.

1645 Flint Road, Downsview, Ontario, Canada M3J 2J6

(416) 665-8460 • 1-800-387-3630

Printed in Canada 29002451 R0