



NAPCO SECURITY SYSTEMS, INC.  
333 BAYVIEW AVENUE  
AMITYVILLE, NEW YORK 11701

SALES, REPAIRS & TECHNICAL SERVICE  
TOLL FREE: (800) 645-9445  
TECHNICAL SERVICE DIRECT LINE  
TOLL FREE: (800) 645-9440

## INSTALLATION INSTRUCTIONS

# GEM-X10KIT X-10 INTERFACE KIT

© Napco 1996

WI781C 6/96

### GENERAL DESCRIPTION

The GEM-X10 module is designed to interface X-10® modules to Napco GEM-Series and MA3000 control panels for home-automation applications. X-10 modules receive commands from the panel through existing 110Vac house wiring to turn on (or off) such electrical devices as lamps, appliances, bells, etc. throughout the premises. A "group" comprising several devices may be activated simultaneously if all respective modules are configured with the same X-10 address (i.e., same HOUSE code and UNIT code).

The GEM-X10 board is wired onto the panel's 4-wire bus along with such other accessories as keypads, relay modules and zone-expansion modules. Four HOUSE codes are provided; these are set by Jumpers JP1-JP4, respectively, on the GEM-X10. Each is selectable for one of 16 combinations ("A"- "P") and each comprises 16 UNIT codes, enabling the GEM-X10 to control up to 64 X-10 devices or groups of devices.

Functionally, the GEM-X10 appears to the panel as up to 8 RM3008 relay modules. However, when it receives a relay command from the panel, the GEM-X10 transmits the command, via the power line, to the X-10 module having the respective HOUSE code and UNIT code (see *HOUSE CODE CONFIGURATION*) to turn the device on or off.

PSC04, An X-10 Power-Line Interface (PSC04, supplied) is required to connect the GEM-X10 to the power line (see Wiring Diagram). The PSC04 transmitter interface forwards commands from the GEM-X10 to the X-10 device. It cannot receive data from the device, thus it cannot monitor the device to verify the integrity of the transmission. (Transmissions are vulnerable to corruption due to noise or other transmitting devices.)

### SPECIFICATIONS

*Voltage:* 12V nominal

*Current Draw:* 30mA

*Control Outputs:* Active low (< 1V), 25mA (External Relays 1-4 only)

*Control Inputs:* Active low (< 1V), (devices 5-8 only)

### INSTALLATION

The GEM-X10 is self contained and therefore may be located anywhere within the premises. Secure the rear case using 4 screws appropriate to the mounting surface.

### WIRING

1. Wire Terminals 1-4 to the control panel's 4-wire bus as

shown in the Wiring Diagram. The maximum wiring run is 1000 feet using #22AWG wire.

2. Connect the GEM-X10 to the power-line interface using a 4-wire RJX cable (not supplied). Limit cable length to 50 feet. Plug the power-line interface into a nearby ac outlet.

3. Connect up to 64 configured X-10 devices to remote ac outlets throughout the premises. **Note:** (1) Some X-10 devices may require installation by a qualified electrician. (2) For reasons of economy and safety, control of production equipment, chillers, refrigeration equipment and life-support systems is not recommended.

### MODULE ASSIGNMENTS

The GEM-X10 must be able to identify which of the RM3008 Relay Modules it should respond as. This is accomplished by the jumper placement of Jumper Block JP5 (RB NUMBERS, see Wiring Diagram). Install a jumper across each relay board number that is being replaced by the GEM-X10. Any combination of RB1-RB8 may be used.

If using relays in combination with X-10 devices, the RM3008 should be assigned the next higher module number after the GEM-X10. (While the GEM-X10 may be intermixed with RM3008 modules, relays and X-10 devices cannot share a common module number.)

**Note:** The CONFIG Jumper Block (JP6) is reserved for possible future applications.

### PROGRAMMING

In designing the system, the GEM-X10 should be treated as up to 8 RM3008 Relay Modules, each comprising 8 relays. Relays dedicated for X-10 devices should be grouped in "banks" of 8; that is, 1-8; 9-16; 17-24, etc., up to 57-64. Relays may also be in the system, but they may not be assigned to the same relay bank as X-10 devices.

Using Napco's PCD3000 Software, one or more X-10 devices can be programmed for recurring timed outputs (Event Scheduler), or to follow monitored conditions, such as output on alarm (External Relay Control).

- (Except for the MA3000.) Program the total number of modules (GEM-X10 + RM3008s) into the panel (# RELAYBOARDS).
- Program the panel as if each X-10 device were an external relay. Therefore, program each device (or group of devices configured the same) for *EXTERNAL RELAY*.

## ENCODING X-10 DEVICES

The mapping of up to 64 external relays to specific X-10 devices is accomplished through the proper selection of 4 HOUSE codes in conjunction with 16 UNIT codes at each device. Refer to *HOUSE CODE CONFIGURATION* and example below.

House codes are employed not only to allow operation of more than 16 devices, but also to prevent interference from other nearby systems on the same electrical circuit. Referring to the House-Code Configuration chart in the Wiring Diagram, up to 16 different combinations can be selected for each house code, however House Code "A", the factory-default setting, is not recommended for use.

**Note:** If two or more devices are to operate simultaneously, both the House code and the Unit code of each should be set alike.

## CONTROL INPUTS

The GEM-X10 includes four active-low inputs that are associated with X-10 devices 5, 6, 7 and 8. These terminals are normally at about 9Vdc. A low (about 1 volt) at any of these terminals will cause the respective X-10 device to turn on.

If any of these inputs are utilized, the related External Relay (5–8) is typically not programmed to activate. However, if the relay *is* programmed, the X-10 device will turn on when either the input is low or the relay activates, and the device will remain on until the input returns high *and* the relay deactivates.

## CONTROL OUTPUTS

The GEM-X10 also features four active-low outputs that follow External Relays 1–4, respectively. Remote X-10 devices (or groups) encoded as 1, 2, 3 and 4 will simultaneously be activated if they are in the system. These terminals are normally at 12Vdc. They will go low (about 1 volt) when the respective X-10 device turns on and will remain low until the device turns off.

With no output device connected, a voltmeter placed across a control output terminal and Remote Power (–) (Terminal 2) will read 0 volts. When troubleshooting the output (with no device connected), connect the positive (+) voltmeter lead to Remote Power (+) (Terminal 1) and the negative (–) lead to the output terminal. If the meter reads 0 volts, the terminal is *off*. If it reads approximately 12 volts, the terminal is *on*.


The control output terminals cannot drive devices that require much current. Applications exceeding 25mA will require an external low-current relay (Napco RB1000 or equivalent), which is available as an optional accessory.

**Direct Line to Technical Service**  
**(800) 645-9440**

*Example.* Configure a system for 30 individually-addressed X-10 devices and 10 relays.

Thirty X-10 devices require that the GEM-X10 respond as four relay modules (8 devices on first three modules, 6 on fourth). Ten relays require two RM3008 modules (8 relays on first module; 2 on second).


1. Configure JP5 on GEM-X10 to identify relay module numbers: Install jumpers on RB NUMBERS 1, 2, 3 and 4.

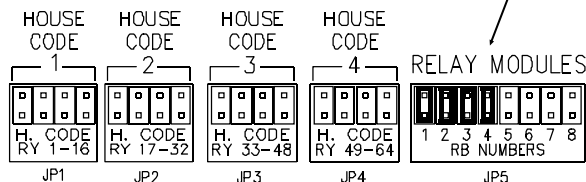

2. Configure RM3008 Relay Modules as numbers 5 and 6 (refer to RM3008 Installation Instructions W1609: *BOARD/MODULE ASSIGNMENT*).


3. Configure House Code #1 (JP1) and House Code #2 (JP2). From the House-Code Configuration Chart (see Wiring Diagram), for this example, we'll select

House Code 1 = "F";  
House Code 2 = "L".

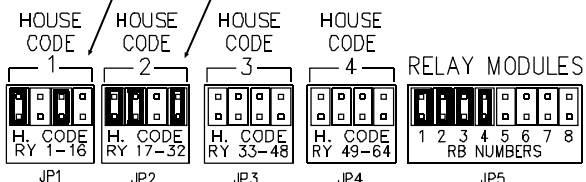


**Note:** House Code "A" is the factory setting and therefore not recommended for use.

4. Set X-10 Modules 1–16 for HOUSE Code 1. Set modules' UNIT Codes for 1–16, respectively (so that each has a unique Unit Code).

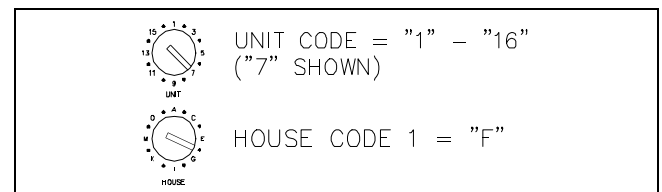


5. Set X-10 Modules 17–30 for HOUSE Code 2. Set modules' UNIT Codes for 1–14, respectively (so that each has a unique UNIT Code).

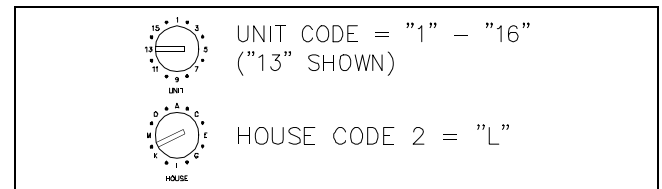

6. Program panel's External Relays 1–30 as required for the 30 X-10 Modules.
7. Program panel's External Relays 33–43 as required for the 10 relays.
8. Except for MA3000, enter a "6" (4+ 2) as the number of modules (# RELAY BOARDS).


# HOUSE CODE CONFIGURATION

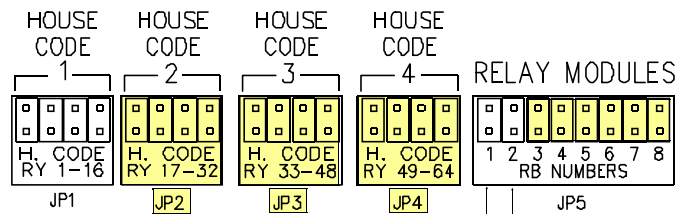

EXT. RLY.	HOUSE CODE 1 ("B"-“P”) <sup>(1)</sup>	UNIT CODE	JP5 RB#
1	( )	1	1
2	AS ABOVE	2	
3	AS ABOVE	3	
4	AS ABOVE	4	
5	AS ABOVE	5	
6	AS ABOVE	6	
7	AS ABOVE	7	
8	AS ABOVE	8	
9	AS ABOVE	9	2
10	AS ABOVE	10	
11	AS ABOVE	11	
12	AS ABOVE	12	
13	AS ABOVE	13	
14	AS ABOVE	14	
15	AS ABOVE	15	
16	AS ABOVE	16	

**HOUSE CODE 1**


<sup>(1)</sup>Select code “B”-“P” (different from House Codes 2, 3 and 4) using JP1. Code “A” not recommended. See configuration chart on page 4.

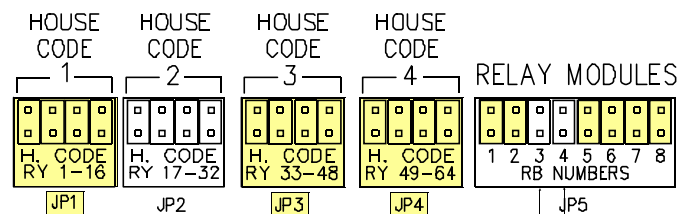

EXT. RLY.	HOUSE CODE 2 ("B"-“P”) <sup>(2)</sup>	UNIT CODE	JP5 RB#
17	( )	1	3
18	AS ABOVE	2	
19	AS ABOVE	3	
20	AS ABOVE	4	
21	AS ABOVE	5	
22	AS ABOVE	6	
23	AS ABOVE	7	
24	AS ABOVE	8	
25	AS ABOVE	9	4
26	AS ABOVE	10	
27	AS ABOVE	11	
28	AS ABOVE	12	
29	AS ABOVE	13	
30	AS ABOVE	14	
31	AS ABOVE	15	
32	AS ABOVE	16	

**HOUSE CODE 2**


<sup>(2)</sup>Select code “B”-“P” (different from House Codes 1, 3 and 4) using JP2. Code “A” not recommended. See configuration chart on page 4.

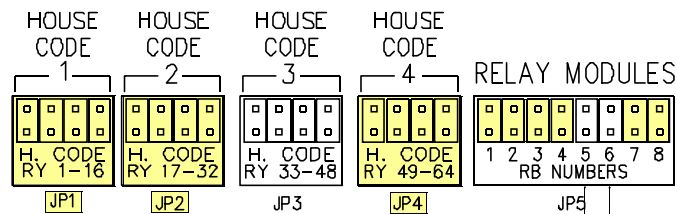

EXT. RLY.	HOUSE CODE 3 ("B"-“P”) <sup>(3)</sup>	UNIT CODE	JP5 RB#
33	( )	1	5
34	AS ABOVE	2	
35	AS ABOVE	3	
36	AS ABOVE	4	
37	AS ABOVE	5	
38	AS ABOVE	6	
39	AS ABOVE	7	
40	AS ABOVE	8	
41	AS ABOVE	9	6
42	AS ABOVE	10	
43	AS ABOVE	11	
44	AS ABOVE	12	
45	AS ABOVE	13	
46	AS ABOVE	14	
47	AS ABOVE	15	
48	AS ABOVE	16	

**HOUSE CODE 3**

<sup>(3)</sup>Select code “B”-“P” (different from House Codes 1, 2 and 4) using JP3. Code “A” not recommended. See configuration chart on page 4.

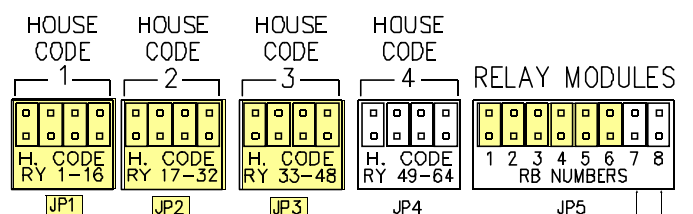


EXT. RLY.	HOUSE CODE 4 ("B"-“P”) <sup>(4)</sup>	UNIT CODE	JP5 RB#
49	( )	1	7
50	AS ABOVE	2	
51	AS ABOVE	3	
52	AS ABOVE	4	
53	AS ABOVE	5	
54	AS ABOVE	6	
55	AS ABOVE	7	
56	AS ABOVE	8	
57	AS ABOVE	9	8
58	AS ABOVE	10	
59	AS ABOVE	11	
60	AS ABOVE	12	
61	AS ABOVE	13	
62	AS ABOVE	14	
63	AS ABOVE	15	
64	AS ABOVE	16	

**HOUSE CODE 4**

<sup>(4)</sup>Select code “B”-“P” (different from House Codes 1, 2 and 3) using JP4. Code “A” not recommended. See configuration chart on page 4.

# GEM-X10 WIRING DIAGRAM

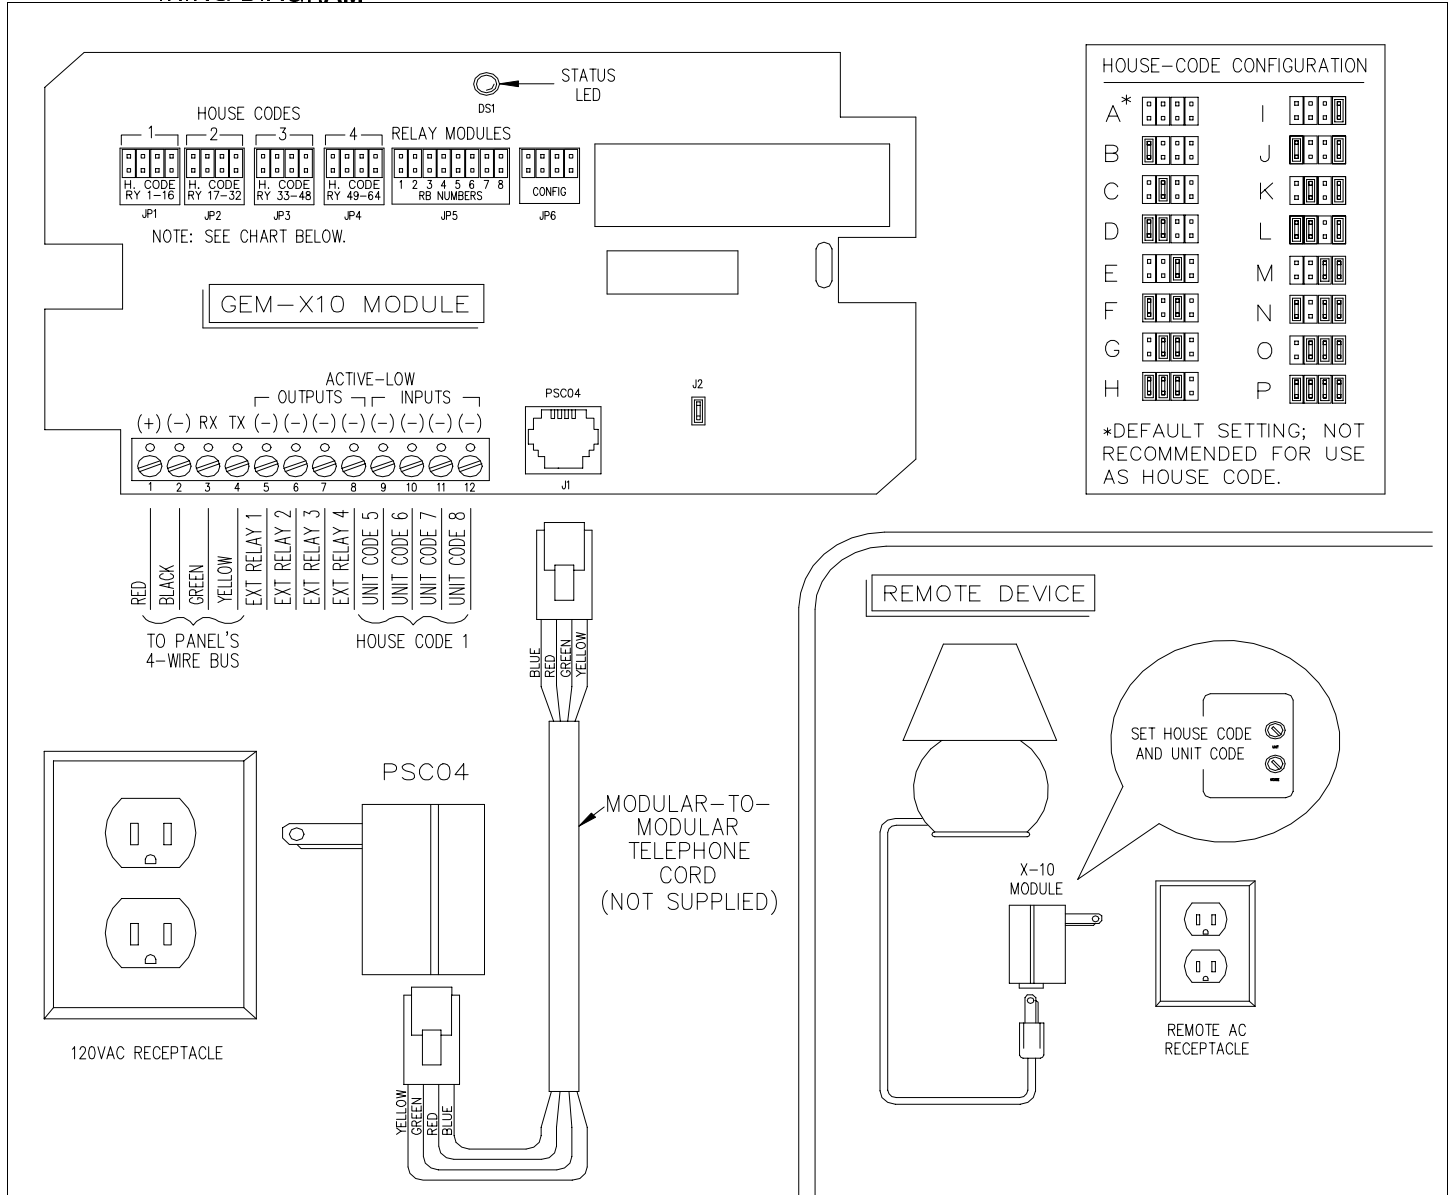

## NAPCO LIMITED WARRANTY

NAPCO SECURITY SYSTEMS, INC. (NAPCO) warrants its products to be free from manufacturing defects in materials and workmanship for thirty-six months following the date of manufacture. NAPCO will, within said period, at its option, repair or replace any product failing to operate correctly without charge to the original purchaser or user.

This warranty shall not apply to any equipment, or any part thereof, which has been repaired by others, improperly installed, improperly used, abused, altered, damaged, subjected to acts of God, or on which any serial numbers have been altered, defaced or removed. Seller will not be responsible for any dismantling or reinstallation charges.

THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. THERE IS NO EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY OR A WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. ADDITIONALLY, THIS WARRANTY IS IN LIEU OF ALL OTHER OBLIGATIONS OR LIABILITIES ON THE PART OF NAPCO.

Any action for breach of warranty, including but not limited to any implied warranty of merchantability, must be brought within the six months following the end of the warranty period. IN NO CASE SHALL NAPCO BE LIABLE TO ANYONE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, EVEN IF THE LOSS OR DAMAGE IS CAUSED BY THE SELLER'S OWN NEGLIGENCE OR FAULT.

In case of defect, contact the security professional who installed and maintains your security system. In order to exercise the warranty, the product must be returned by the security professional, shipping costs prepaid and insured to NAPCO. After repair or replacement, NAPCO assumes the cost of returning products under warranty. NAPCO shall have no obligation under this warranty, or otherwise, if the product has been repaired by others, improperly installed, improperly used, abused, altered, damaged, subjected to accident, nuisance, flood, fire or acts of God, or on which any serial numbers have been altered, defaced or removed. NAPCO will not be responsible for any dismantling, reassembly or reinstallation charges.

This warranty contains the entire warranty. It is the sole warranty and any prior agreements or representations, whether oral or written, are either merged herein or are expressly cancelled. NAPCO neither assumes, nor authorizes any other person purporting to act on its behalf to

modify, to change, or to assume for it, any other warranty or liability concerning its products.

In no event shall NAPCO be liable for an amount in excess of NAPCO's original selling price of the product, for any loss or damage, whether direct, indirect, incidental, consequential, or otherwise arising out of any failure of the product. Seller's warranty, as hereinabove set forth, shall not be enlarged, diminished or affected by and no obligation or liability shall arise or grow out of Seller's rendering of technical advice or service in connection with Buyer's order of the goods furnished hereunder.

NAPCO RECOMMENDS THAT THE ENTIRE SYSTEM BE COMPLETELY TESTED WEEKLY.

Warning: Despite frequent testing, and due to, but not limited to, any or all of the following; criminal tampering, electrical or communications disruption, it is possible for the system to fail to perform as expected. NAPCO does not represent that the product/system may not be compromised or circumvented; or that the product or system will prevent any personal injury or property loss by burglary, robbery, fire or otherwise; nor that the product or system will in all cases provide adequate warning or protection. A properly installed and maintained alarm may only reduce risk of burglary, robbery, fire or otherwise but it is not insurance or a guarantee that these events will not occur. CONSEQUENTLY, SELLER SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE, OR OTHER LOSS BASED ON A CLAIM THE PRODUCT FAILED TO GIVE WARNING. Therefore, the installer should in turn advise the consumer to take any and all precautions for his or her safety including, but not limited to, fleeing the premises and calling police or fire department, in order to mitigate the possibilities of harm and/or damage.

NAPCO is not an insurer of either the property or safety of the user's family or employees, and limits its liability for any loss or damage including incidental or consequential damages to NAPCO's original selling price of the product regardless of the cause of such loss or damage.

Some states do not allow limitations on how long an implied warranty lasts or do not allow the exclusion or limitation of incidental or consequential damages, or differentiate in their treatment of limitations of liability for ordinary or gross negligence, so the above limitations or exclusions may not apply to you. This Warranty gives you specific legal rights and you may also have other rights which vary from state to state.