FCC COMPLIANCE STATEMENT

CAUTION: Changes or modifications not expressly approved by Digital Security Products Ltd. could void your authority to use this equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

• Re-orient the receiving antenna.

• Increase the separation between the equipment and receiver.

• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

• Consult the dealer or an experienced radio/television technician for help.

The user may find the following booklet prepared by the FCC useful: "How to Identify and Resolve Radio/Television Interference Problems". This booklet is available from the U.S. Government Printing Office, Washington D.C. 20402, Stock # 004-000-00345-4.
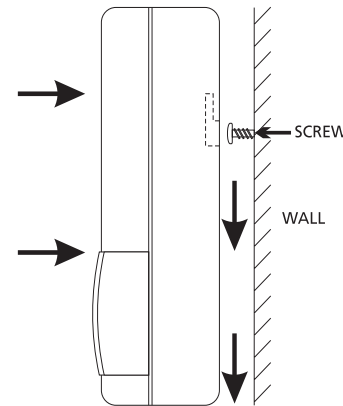
COMMUNIQUÉ™

Radio Unit

The Communiqué Radio unit is an AM/FM tuner which can provide background and holding music for the Communiqué telephone system. The radio can be programmed and tuned from any digital telephone set on the system.

Mounting and Connecting the Radio Unit

1. Locate an area close to the Communiqué central processor cabinet to which the radio unit will be mounted. Fasten the two mounting screws to the wall, making sure that they are the same distance apart as the mounting holes on the back of the unit.

2. Place the radio unit over the screws and then press it down towards the floor to secure it into place (*see diagram below*).

3. Once the radio unit is mounted to the wall, it can be connected to the Communiqué central processor board. Using the provided 8-conductor ribbon cable, connect one end to the RJ45-type jack on the radio unit (*see diagram below: Audio In*). Connect the other end of the cable to the RJ45-type jack marked AUDIO I/P located on the central processor board.

4. Connect an antenna (coaxial cable, not provided) to the radio using a standard coaxial connector (*see diagram below: Antenna In*)

RADIO UNIT

ANTENNA IN   AUDIO IN