




Conettix IP C900V2 Dialer Capture Module

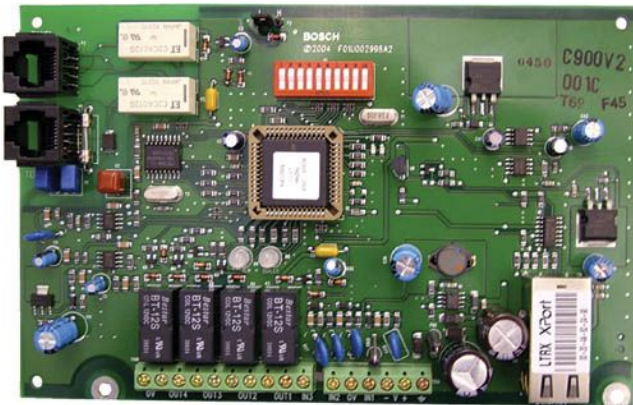

- ▶ Captures alarm and event data from dialer-based control panels using CONTACT ID, SIA, Modem II, Modem IIe, Modem IIIa², Pulse, and other formats
- ▶ Performs full data transmissions without changing the data
- ▶ 12 VDC to 24 VDC voltage range
- ▶ Re-routes signals using UDP/IP-based data networks
- ▶ Convenient connection (RJ-45 Jack) to Ethernet networks
- ▶ Integrated 10/100 Network Interface Module (NIM)
- ▶ Provides acknowledgement from the receiver to the control panel

The C900V2 Dialer Capture Module works with most control panels using a standard digital dialer format and provides end-to-end security. The module links the digital dialer to the Public Switched Telephone Network (PSTN), the digital dialer's telephone interface, and an Ethernet network. With the Ethernet link, the C900V2 can:

- Communicate with the control panel dialer
- Decode and deliver signals to a D6600 Communications Receiver/Gateway
- Relay a confirmation message back to the control panel dialer

Whether a control panel dials through a telephone line or through the C900V2 Dialer Capture Module, the data remains the same. The C900V2 empowers digital dialer control panels to work over an IP network such as a Local Area Network (LAN), a Wide Area Network (WAN), or the Internet.

Functions

Communication Formats

ADT-SIA

BFSK (2300Hz ACK Tone or 1400Hz ACK Tone)

DTMF (Contact ID, High Speed and 4/2 Express)

FBI Superfast DTMF (1400 Hz ACK Tone or 2300 Hz ACK Tone)

Pulse 3/1, 3/1 Checksum, 4/2 (1400 Hz ACK Tone or 2300 Hz ACK Tone)
 Radionics Modem II, Radionics Modem IIe, and Modem IIIa²
 Seriee FSK and DTMF
 SIA V.21, 110/300 baud
 SIA Bell 103, 110/300 baud
 Robofon
 Telim

Inputs

| Input | Description |
|-------|---|
| 1 | Used as an end-of-line (EOL) supervised loop. Detects open, short, and normal states. Terminate this input with a 10 kΩ EOL resistor. |
| 2 | Used for intercept inhibit to force the C900V2 into Fallback mode for at least two minutes. |
| 3 | Used for intercept override, allowing users to switch between intercept and fallback modes. |

Outputs

| Output | Description |
|--------|---|
| 1 | Provides local annunciation if the power to the C900V2 is lost or the CPU fails. |
| 2 | Provides local annunciation if the connection to the monitoring center is lost. |
| 3 | Provides local annunciation whenever the C900V2 is in intercept mode. |
| 4 | Controllable from the monitoring center and the D6200 Programming Software (default is open). |

Intercept and Fallback Modes

- **Intercept Mode:** The C900V2 connects the dialer to the network. Intercept mode remains on as long as the C900V2 remains in continuous contact with the D6600 Communications Receiver/Gateway.
- **Fallback Mode:** The C900V2 connects the dialer to the telephone line, removing itself from the telephone circuit. Fallback mode occurs if the C900V2 loses contact with the D6600 Communications Receiver/Gateway, loses power, or stops operating correctly.

LED Indicators

The C900V2 has two dual-colored LEDs that indicate the module's status (the SYSTEM LED and the DIALER LED).

Modular Jacks


The C900V2 module has three modular jacks.

- **Panel Jack:** Connects to a dialer through a modular telephone cord (D162).
- **TELCO Jack:** Connects to a PSTN line through a modular telephone cord (D162).
- **Ethernet Jack:** Connects to the Ethernet data network through an Ethernet cable. For 10BASE-T, the cable must be Category 3 or better. For 100BASE-T, the cable must be Category 5 or better.

Polling and Supervision

C900V2 polling helps the D6600 Communications Receiver/Gateway to perform supervision.


Web Programming Tool

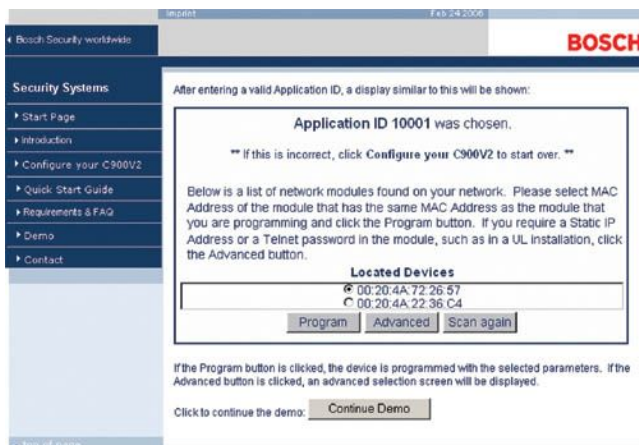

The web programming tool makes the C900V2 configuration process simple and convenient, similar to browsing a web site. After obtaining an Application ID, installers can go to www.c900v2.com from a computer with internet access and configure the C900V2 for the preferred central station.

System Overview

When the dialer has a message to report, the C900V2 simulates dial tone and line voltages, causing the dialer to behave as though it is connected to a monitoring center digital receiver through the PSTN. The C900V2 decodes and converts the transmitted dialer message to data for transport over any UDP/IP network. After the D6600 Communications Receiver/Gateway receives a message or event, it sends an acknowledgement message to the C900V2. The C900V2 returns an appropriate response to the dialer, maintaining end-to-end acknowledgment. The C900V2 operates in Intercept Mode, connecting the dialer to the network under normal circumstances. If the C900V2 loses contact with the D6600 Communications Receiver/Gateway, the unit goes into Fallback Mode, connecting the dialer to the PSTN telephone line.

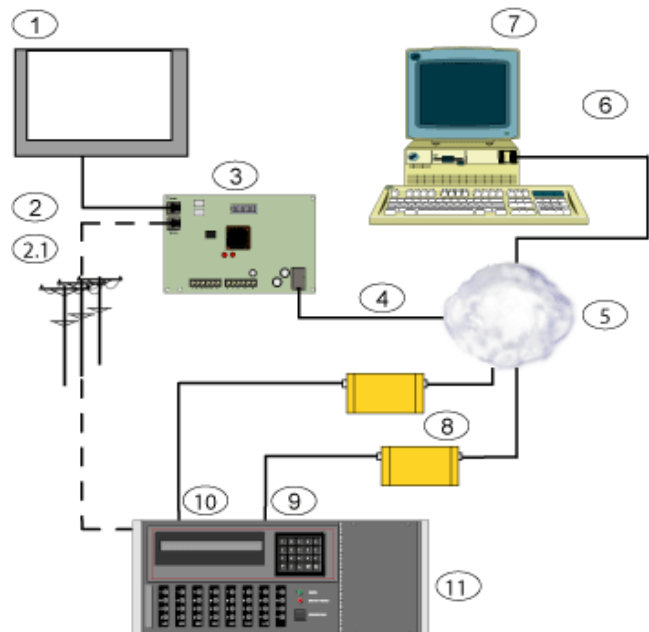

1. Control Panel
2. Dialer Connection
- 2.1 Dialer Output to RJ-31x Jack and PSTN
3. C900V2 Dialer Capture Module
4. Ethernet or LAN Connection
5. LAN, WAN, or the Internet
6. Connection To Ethernet Network Interface Card (NIC)
7. Host PC with D6200 Programming Software
8. D6680 Ethernet Network Adapter
9. Com 1 (Optional)
10. Com 4
11. D6600 Communications Receiver/Gateway

Certifications and Approvals

| | |
|--------------|---|
| UL Standards | UL864, UL Commercial Fire Alarm signaling UL1610, Central Station Burglary, Line Security (Grade AA) |
| Approvals | CE FCC, Part 15 Radiated/Conducted Emissions IC A-Tick |

Technical Specifications

Connectors

| | |
|-----------------|--|
| Control Panel: | RJ-45 Modular Jack |
| Telco: | RJ-45 Modular Jack |
| LAN/WAN: | RJ-45 Modular Jack |
| Ethernet Cable: | Unshielded twisted pair 100 m (328 ft) For 10BASE-T, use Category 3 or better. For 100BASE-T, use Category 5 or better. |

Environmental Considerations

| | |
|--------------------------|--------------------------------|
| Temperature (Operating): | 0°C to +49°C (+32°F to +120°F) |
|--------------------------|--------------------------------|

Indicators

| | |
|---------------------|----------------|
| Module Status LEDs: | 2 dual-colored |
|---------------------|----------------|

Module

| | |
|-------------|--|
| Dimensions: | 17.8 cm x 11.4 cm (7 in. x 4.5 in.) |
|-------------|--|

| | |
|------------|------------|
| Interface: | IEEE 802.3 |
|------------|------------|

Power Requirements

| | |
|--------------------|---------------------------------|
| Current (Maximum): | 280 mA |
| Voltage Range: | 12 VDC to 24 VDC nominal |
| Alarm Outputs: | Normally-open (NO) dry contacts |

Protocols

| | |
|-----------------------|----------------|
| Output To LAN or WAN: | UDP/IP packets |
|-----------------------|----------------|

Ordering Information

| | |
|---|--------|
| Conettix IP C900V2 Dialer Capture Module | C900V2 |
| Compatible with control panels using a standard digital dialer format. Provides end-to-end security. Allows digital dialer control panels to work over an IP network (such as LAN, WAN, or the Internet). | |

Hardware Accessories

| | |
|---|------|
| D162 Modular Telephone Cord | D162 |
| A 61 cm (2 ft) telephone cord with a standard plug on one end. | |
| AE1 Standard Enclosure (Gray) | AE1 |
| Standard gray enclosure made of 1.0 mm cold-rolled steel. Includes a keyed lock. The dimensions are 35.6 cm x 31.8 cm x 7.6 cm (14 in. x 12.5 in. x 3 in.). | |
| AE4 Large Enclosure (Red) | AE4 |
| Large red enclosure made of 1.2 mm cold-rolled steel. Includes a keyed lock. Measures 52.7 cm x 38.1 cm x 10.8 cm (20.7 in. x 15 in. x 4.25 in.). | |

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
 Phone: +31 40 27 83955
 Fax: +31 40 27 86668
 emea.securitysystems@bosch.com
 www.boschsecurity.com

Americas:
 Bosch Security Systems
 130 Perinton Parkway
 Fairport, New York, 14450, USA
 Phone: +1 585 223 4060
 Fax: +1 800 289 0096
 security.sales@us.bosch.com
 www.boschsecurity.us

Asia-Pacific:
 Bosch Security Systems Pte Ltd
 38C Jalan Pemimpin
 Singapore 577180
 Phone: +65 6319 3450
 Fax: +65 6319 3499
 apr.securitysystems@bosch.com
 www.boschsecurity.com

Represented by