


## READYKEY® K2016 Mounting Bracket Installation Instructions

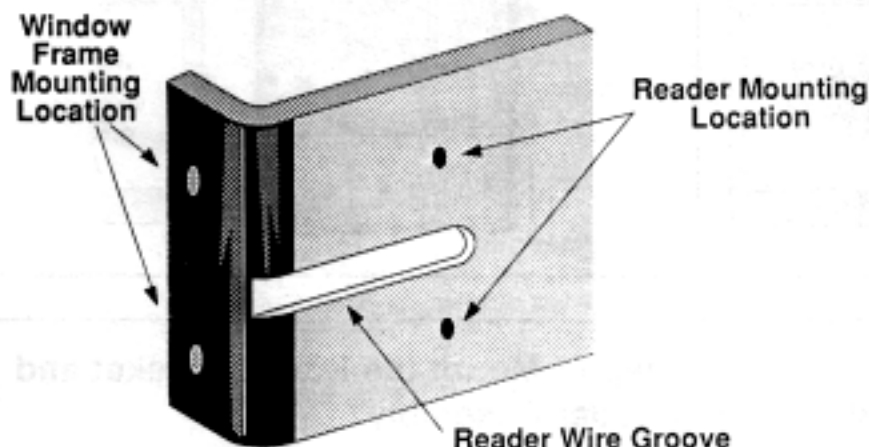


### Description

The K2016 Mounting Bracket is made from a durable black plastic. It is used to mount the K2001 Reader to a metal door or window frame to hold the reader behind glass.


### Step 1: Mark the Hole Locations

Hold the reader up to the bracket. Place the bracket up to the door or window frame with the reader  $\frac{1}{8}$  inch away from the glass. Mark the location of the two mounting holes, as well as where the Reader Wire Groove meets the frame.

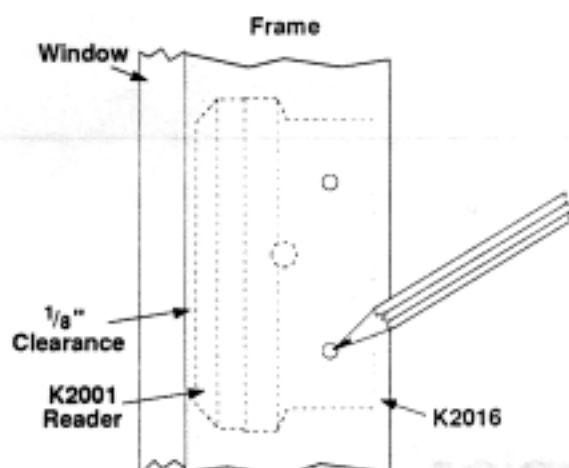

### Step 2: Drill the Holes


Drill two  $\frac{3}{16}$ " (.140") holes for the mounting bracket and one hole large enough to accommodate the reader wire. The mounting bracket holes must be at least  $1\frac{5}{8}$ " away from the window.

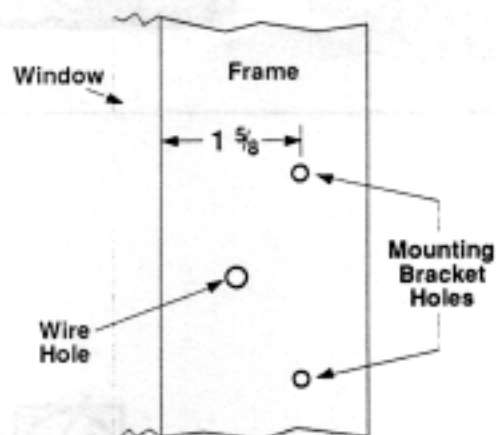

### Step 3: Wire the Reader


Wire the K2001 Reader to the door controller as described in the K2000-N/K2000-AM Installation Manual (RPN #74-05874-000).

Make sure you run the wire through the hole in the mounting plate before connecting the reader.

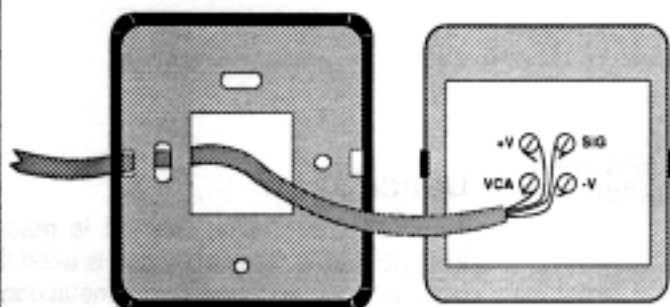


### Step 4: Attach the Reader Base Plate

Using the  $\frac{3}{16}$ " screws, mount the reader base plate to the K2016 as shown. Run the wire through the wire groove on the K2016.

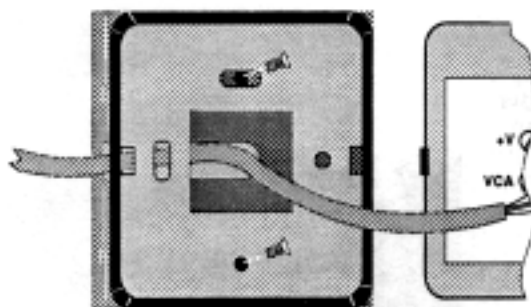


### Step 5: Attach the Reader

Snap the reader to the mounting plate. Push any extra wire into the hole in the window frame to remove any slack.

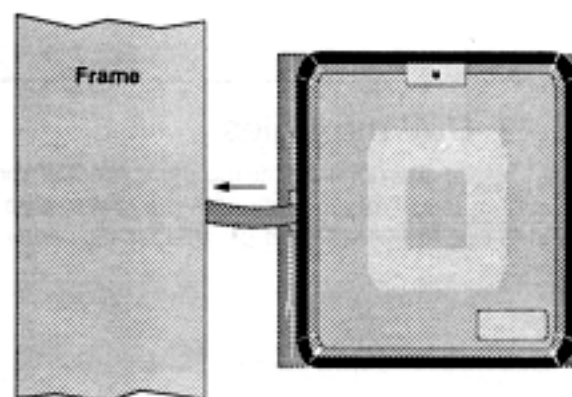

### Step 6: Mount the K2016 Bracket and Reader Assembly

Mount the unit using the two  $\frac{3}{4}$ " screws.

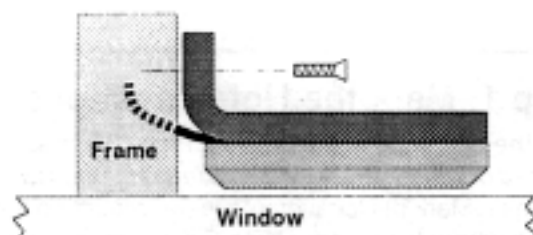

**Radionics™**

T H E   Q U A L I T Y   L E A D E R

1800 Abbott Street   P.O. Box 80012   Salinas, California 93912-0012

Technical Support: (800) 538-5807