

FIRE•COMMAND•25/50X & FIRE•COMMAND•25/50XE ——— Operating Instructions

NORMAL - Only the GREEN A.C. POWER LED is on. All other LEDs are off.

PANEL - The key to open the panel can be found at this location: _____

WHEN AUDIBLE DEVICES ARE SOUNDING - FOR AN ALARM:

- 1) Evacuate the protected area.
- 2) Notify the monitoring service and/or the Fire Department immediately. Tell them briefly what happened and what your current status is.
- 3) If the Fire Department is responding, be prepared to provide directions to arriving firefighters.

FOR TROUBLE ONLY:

- 1) Notify the monitoring service and/or Fire Department if the host panel is connected to either one, and tell them what is happening.
- 2) Silence local piezo by pressing the TROUBLE SILENCE key. The yellow SYSTEM TROUBLE LED will remain on. Contact authorized service personnel immediately!

TO PAGE IN STANDBY (NON-ALARM)

- 1) Pick up microphone.
- 2) Key the microphone by pressing switch on side of microphone.
- 3) Speak clearly into microphone.

TO PAGE WHILE IN ALARM

- 1) Pick up microphone.
- 2) Push and hold the Manual Evacuate/Message Override switch in the down (Message Override) position. This will override/interrupt the evacuation tone/message.
- 3) Key the microphone by pressing switch on side of microphone.
- 4) Speak clearly into microphone.
- 5) Release microphone switch and Manual Evacuate/Message Override switch to continue evacuation tone/message.

POWER FAILURE OR BROWNOUT - The AC power LED, located on the FC-PSM/FC-PSME Power Supply/Battery Charger module, will go out for AC fail or brownout. SYSTEM TROUBLE LED and the local piezo will turn on for either condition. Contact authorized service personnel immediately.
(Refer to Local Service Representative block below).

WARNING!


Do not allow trouble conditions to remain logged in the system. Protection that the system offers has been compromised, or eliminated when a trouble condition exists.

Frame and mount adjacent to the control panel.

INSTRUCTIONS

To activate evacuation message manually, move switch up

To turn off the local trouble sounder, press

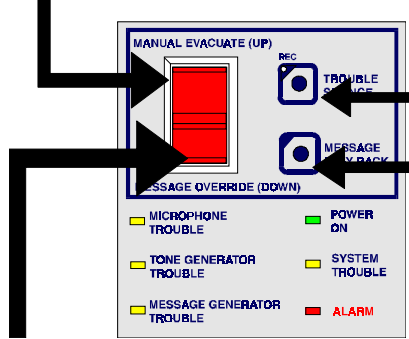

To override/interrupt alarm message in order to page, press and hold switch down

To monitor message locally, press

OPTIONS

This unit has been installed with the following options selected:

Single Fire Message.....

Dual Message.....

Leading/Trailing Tone

Hi/Lo.....

Steady.....

Chime.....

Slow Whoop.....

Temporal.....

Message Repeat Cycle

3.....

4.....

6.....

8.....

Continuous.....

Speaker Circuit #1

25 V_{RMS}.....

70 V_{RMS}.....

Speaker Circuit #2

25 V_{RMS}.....

70 V_{RMS}.....

Backup Enabled.....

Refer to the FIRE•COMMAND•25/50X(E) Technical Manual P/N 51604 for more details.

Local Service Representative

Name: _____

Address: _____

Telephone: _____