



Model 32A32-1 Video Encoder

DESCRIPTION

The Model 32A32-1 HAI Video Encoder digitizes video signals from cameras that are connected to an HAI Touchscreen Hub and sends it to OmniTouch with Video touchscreens for viewing.

The HAI Video Encoder is required to view video on OmniTouch with Video touchscreens.

INSTALLATION

The HAI Video Encoder mounts onto the Touchscreen Hub. Install the Video Encoder as follows:

1. Insert the short end of each of the 4 supplied nylon standoffs into the mounting holes on the Touchscreen Hub. Make sure that the standoff snaps into the mounting holes.
2. With the pins (marked “J2 ALT”) on the Video Encoder faced down, align the mounting holes on the Video Encoder with the installed standoffs on the Touchscreen Hub. Rest the Video Encoder board on the standoffs.
3. Align the pins (marked “J2 ALT”) on the Video Encoder with the connector (marked “J27”) in the Touchscreen Hub.
4. Gently push down so that the pins (marked “J2 ALT”) are firmly seated into the connector (marked “J27”).
5. Push down on the Video Encoder board at the locations of each mounting hole, so that each of the standoffs snaps into the mounting holes.

(Connections Diagram on Next Page)

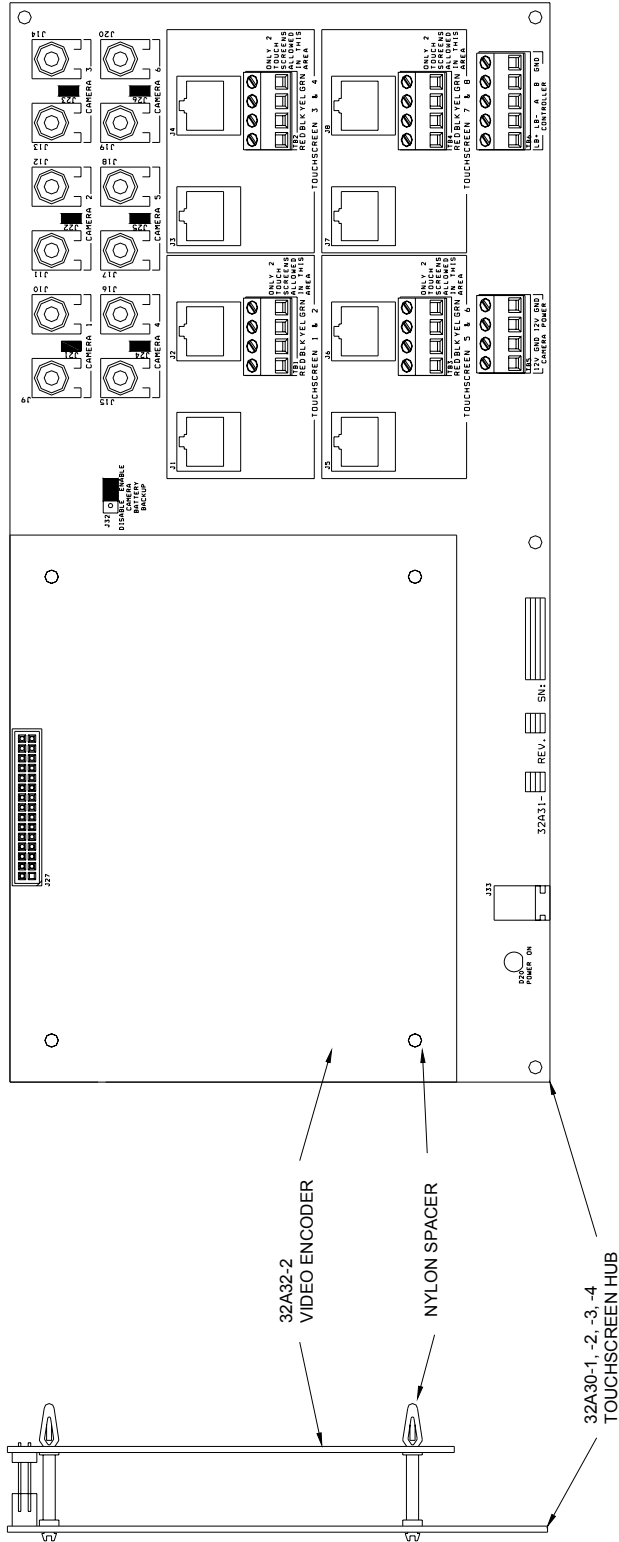


FIGURE 1 – INSTALLING THE MODEL 32A32-1 VIDEO ENCODER