


DF-16 2-WAY AUDIO ADVANCED CONFIGURATIONS

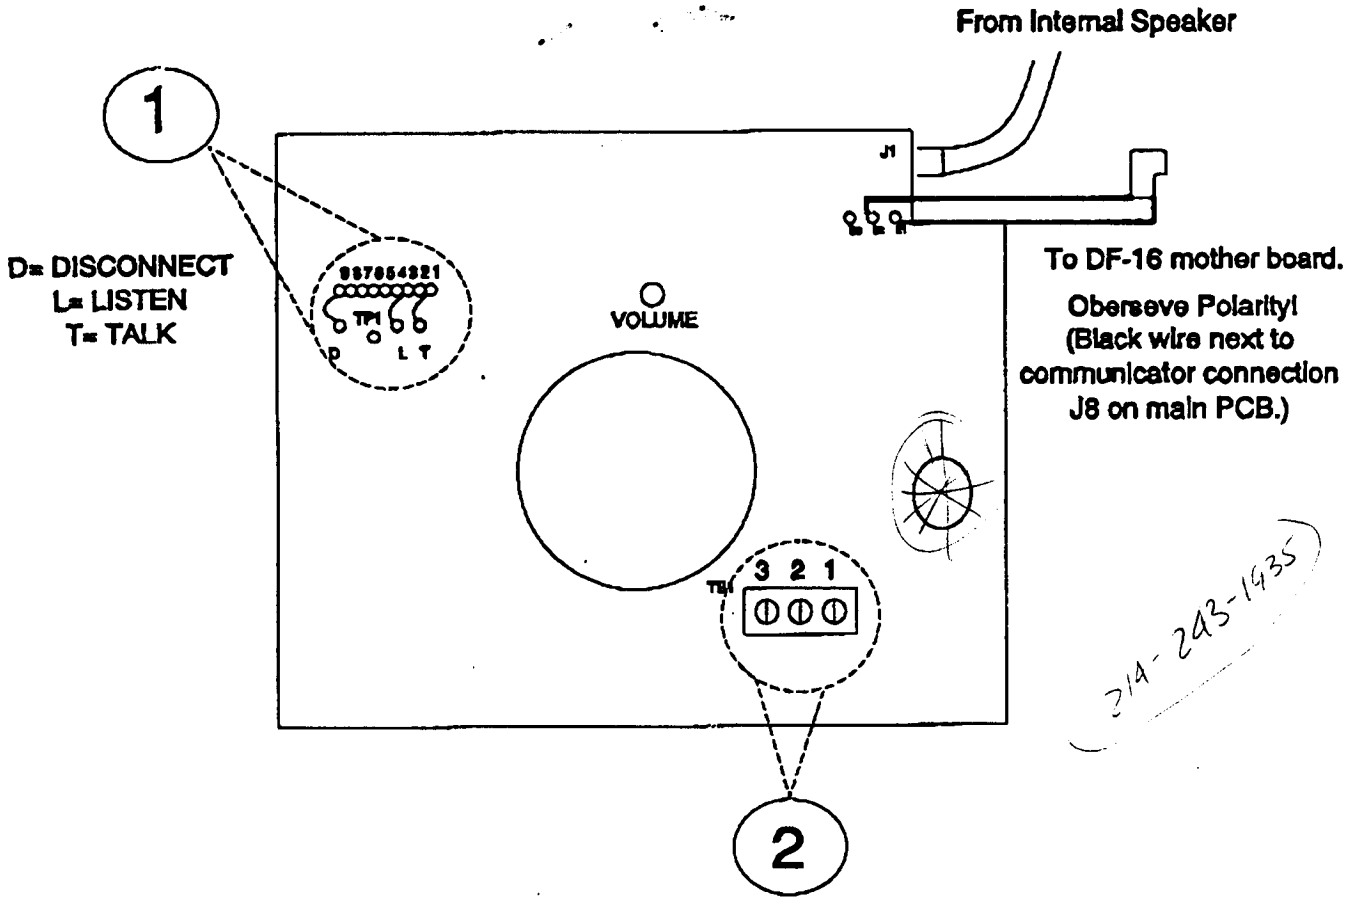

OPTIONS

1 COMMAND TONES

The command tones may be changed by removing the jumpers from the factory settings and resoldering them in the locations that correspond to the desired command digit.

2 EXTERNAL MICROPHONE

An external microphone may be added to terminals 1 and 2 of connector TB1 via a two conductor SHIELDED cable. This will allow for a remote microphone to be used in 2-way communications. Pin 1 is the positive (+) microphone connection and pin 2 is the connection for microphone negative (-) and shield.

NOTE: Do not connect the ground and shield at the microphone end.