



# ALTV244-300/220 - High Current CCTV Camera & Accessory Power Supply

## Overview:

The Altronix ALTV244-300/220 CCTV Power Supply is designed with four (4) individually fused outputs for powering CCTV Cameras, environmental housings and other video accessories. It will provide 24VAC distributed via four (4) fused outputs with a total of 12.5 amps continuous supply current.

## Specifications:

- Input 220AC 50/60 Hz, 1.35 amps.
- 24VAC output.
- Four (4) 24VAC individual fuse protected outputs.
- 12.5 amps (300VA) supply current.
- Output fuses are rated at 3.5 amps / 250VAC.
- Surge protection.
- AC power LED indicator.
- Power ON/OFF switch.
- Spare fuse included.
- Unit maintains camera synchronization.
- Ease of installation saves time and eliminates costly labor.

Enclosure dimensions: 12.25"H x 7.25"W x 4.5"D

## Installation Instructions:

1. Mount ALTV244-300/220 in desired location
2. Slide switch SW1 (Fig. 1) to OFF position.
3. Connect the AC (220VAC 50/60 Hz) to the black and white flying leads of the transformer (Fig. 1).
4. Connect each camera to terminal pairs 1 to 4, marked [1P-1N thru 4P - 4N] (Fig. 1).

**Note:** Is good operating practice to measure output voltage before connecting devices. All terminals with common suffix P 1P, 2P..." are same polarity.

5. Slide switch SW1 (Fig. 1) to ON position.
6. Green LED will illuminate when AC power is present
7. Upon completion of wiring, secure enclosure door with screws (supplied).

**WARNING:** To reduce the risk of fire or electric shock, do not expose the unit to rain or moisture. This installation should be made by qualified service personnel and should conform to all local codes and in accordance with the National Electrical Codes.

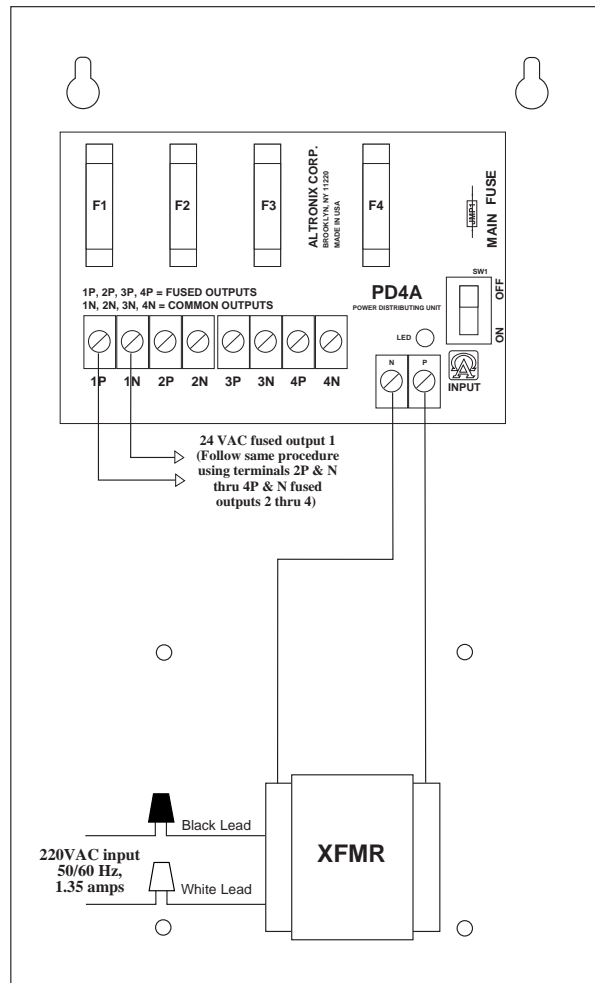


Fig. 1

**Enclosure dimensions:**  
12.25"H x 7.25"W x 4.5"D

