



PD4 - Power Distribution Module

Overview:

The PD4 Power Distribution Unit is a convenient way to convert a single DC or AC output power supply to four (4) individually fused outputs.

Specifications:


- Conveniently converts a single AC or DC input into four (4) individually fused outputs.
- Surge protected outputs.
- Handles up to 28VAC/VDC.
- Fuses rated at 3.5 amps.
(up to 5 amp fuses may be used).
- Power output LED indicator.
- Power ON / OFF switch.

Board dimensions: 3.25"H x 5.25"W x 1"D



Installation Instructions:

1. Mount PD4 in desired location/enclosure.
2. Connect the desired power supply output to input terminals marked [1] and [2]
(If using DC voltage terminal [1] is NEG. (-) terminal [2] is POS. (+).
Note: If using DC take care to follow polarity indicated on above diagram.
3. Connect each camera to terminal pairs 1 to 4, marked [1P-1N thru 4P - 4N].
Note: Is good operating practice to measure output voltage before connecting devices. All terminals with common suffix P 1P, 2P..." are same polarity.
4. Fuses rated at 3.50 amps / 250 VAC (Replacement fuses can be rated at 5.0 amps).
Note: It is good operating practice to measure and verify output voltage before connecting devices to ensure proper operation of equipment.
5. Slide switch on board turns output power ON and OFF.

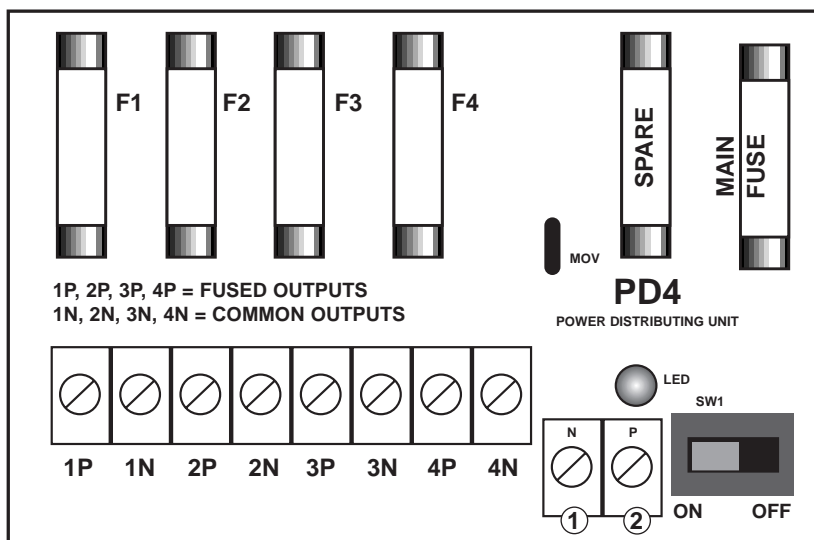

MEMBER

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.