


BRKT-9600


Universal Bracket for MS-9600

Product Installation Document

Doc. #51458 Rev. A ECN 00-455 10/12/00

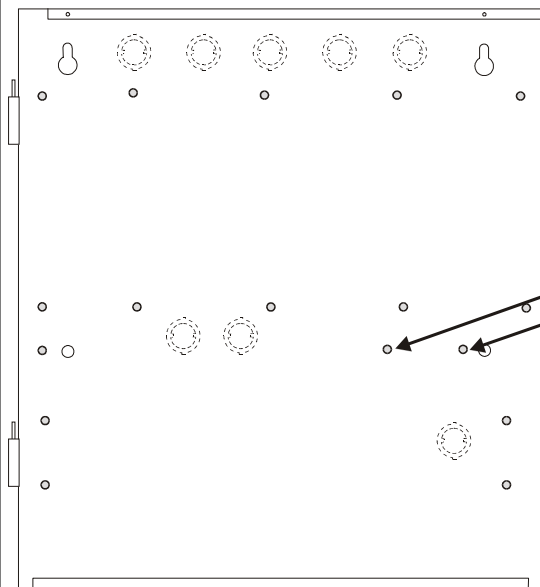

MS-9600 Cabinet



Mount Universal Bracket with hex nuts to PEM studs on back of cabinet.

BRKT-9600 Installation:

The BRKT-9600 Universal Bracket, which can hold one module, mounts to two studs located in the lower right corner of the MS-9600 cabinet as illustrated to the left. The BRKT-9600 is shipped with two hex nuts, which are used to fasten the bracket to the PEM studs on the back wall of the cabinet.

Important! When the Universal Bracket is installed, the MS-9600 cabinet can hold a maximum of two 12 Amp Hour Batteries.

Module Installation on BRKT-9600 Universal Bracket:

Any one of the following modules can be installed inside the MS-9600 cabinet using the BRKT-9600:

- UDACT-F Digital Alarm Communicator/Transmitter - installs at standoff location (A)
- ACM-8RF Annunciator Control Module (Relay) - installs at standoff location (A)

Refer to the appropriate module manual for detailed information on module operation and wiring.

1. Install the two supplied standoffs in location (A) as indicated in Figure 1
2. Position the module bottom in the slot located in the bottom of the BRKT-9600 as illustrated in Figure 2.
3. Secure module to the standoffs installed in the top of the BRKT-9600 with two mounting screws as illustrated in Figure 3.

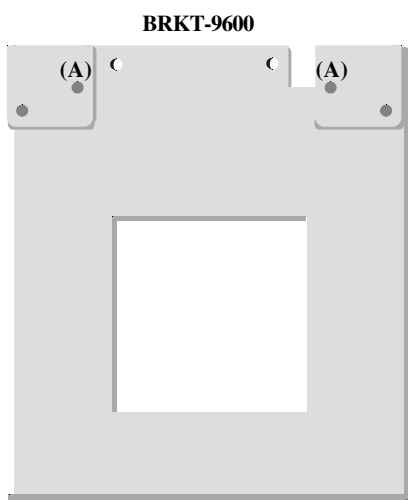


Figure 1: Universal Bracket (front view)

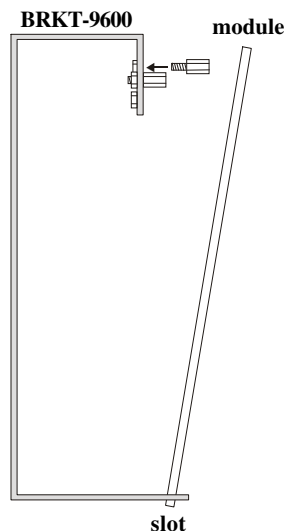


Figure 2: Universal Bracket (slot)

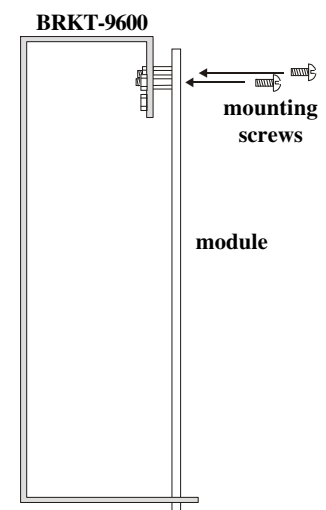


Figure 3: Universal Bracket (mounting)