


# WIZARD™ II

*The Wizard II is an advanced, voice prompted, phone module that works with your Gemini™ Security System to make any phone a talking, interactive keypad!*

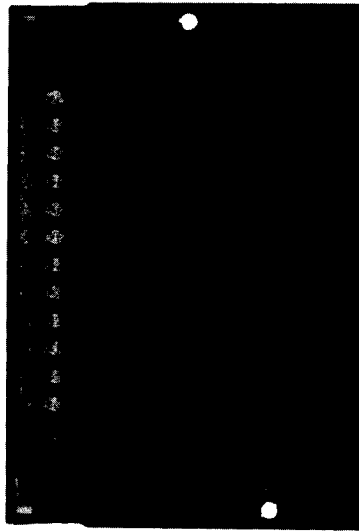

When you add the Wizard II Talking Remote Controller to a Gemini System, any Touch-tone™ phone is an interactive “talking”, “virtual keypad”, even your cellular phone! The Wizard II enables you to easily control your security system wherever you may be, on the way home from work, school, or even when you are away on vacation anywhere in the world.

*With the Wizard II, wherever you are, you're always in complete control of your security system and automated appliance(s).*


The Wizard II also features three individual home automation/appliance outputs for convenient optional control of lighting, air conditioning and heating systems, etc. You can easily phone into the Wizard II for complete “spoken” alarm system/appliance status reporting and control! The Wizard II's commands are easily activated by answering its YES or NO questions, using just 2 phone keys. The Wizard II fully supports Gemini Hardwire/Wireless Systems, and brings you the convenience of “remote controlling” your security system right to your fingertips!

• NAPCO original Wizard, as above, for use with Magnum Alert® Systems, also available.

INTERACTIVE  
PHONE MODULE



NAPCO's **WIZARDS** are the talking voice-synthesized interfaces that provide subscribers local or remote access to their alarm system using any Touch-Tone™ phone anywhere (on or off premises). Easy to understand voice prompts coupled with a system-customized 250-word vocabulary, guide the subscriber through all the functions by asking simple YES or NO questions, that subscribers answer by just pressing a key or two. Wizard functions include: checking system status, arming, disarming, bypassing zones and controlling appliances.

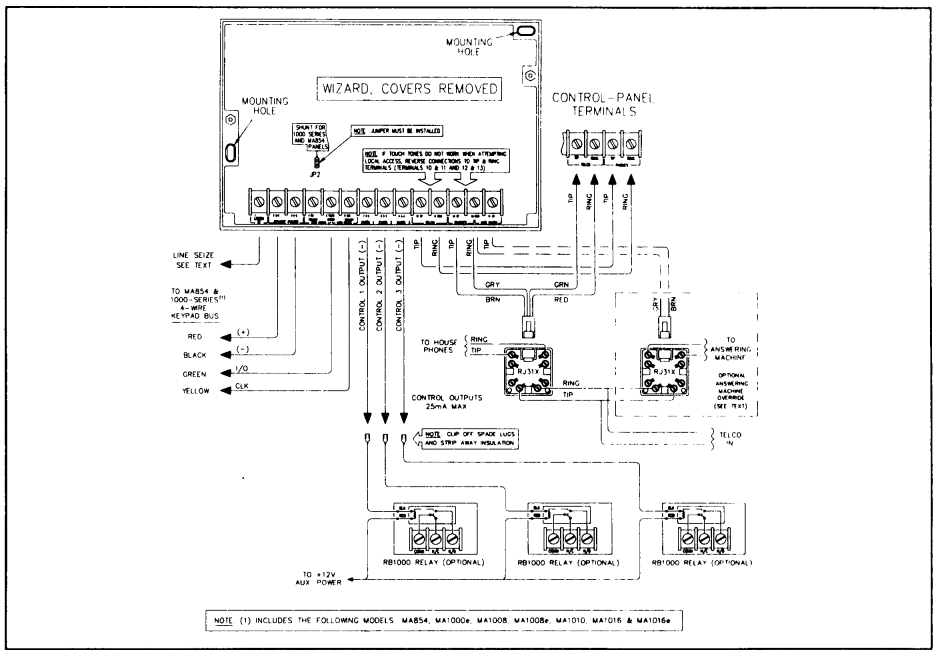

### DESCRIPTOR LIBRARY

Following is a list of programmable descriptors that are stored in memory; each is identified by its three-digit number:

ACCOUNTING.....001	FIRE.....046	PROTECTION.....089
AIR CONDITIONER.....002	FIRST.....047	REAR.....090
APARTMENT.....003	FIVE.....048	REFRIGERATOR.....091
AREA.....004	FLOOD.....049	RELAY.....092
ATTIC.....005	FLOODING.....050	RIGHT.....093
CHILD'S.....006	FLOOR.....051	ROOM.....094
BASEMENT.....007	FOIL.....052	SAFE.....095
BATH.....008	FORTY.....058	SALES.....096
BATTERY.....009	FOUR.....055	SECOND.....098
BED.....010	FOURTEEN.....056	SECURE.....101
BELL.....011	FOURTH.....057	SELECTED.....104
BOARD.....012	FOYER.....053	SEVEN.....102
BOAT.....013	FRONT.....054	SEVENTEEN.....103
BOILER.....014	GARAGE.....059	SEVENTH.....106
BOYS'.....015	GATE.....060	SEVENTY.....105
BROKEN.....016	GIRLS'.....061	SHED.....097
BUILDING.....017	GLASS.....062	SIGN.....099
BURNER.....018	GREENHOUSE.....063	SIX.....100
CEILING.....019	HIGH.....064	SIXTEEN.....107
CLOSET.....020	HOUR.....065	SIXTH.....108
COMPUTER.....021	INTERIOR.....066	SIXTY.....109
CONTROL.....022	KITCHEN.....067	SKYLIGHT.....110
DAUGHTER'S.....023	LEFT.....068	SMOKE.....111
DAY.....024	LIGHTS.....069	SON'S.....112
DEN.....025	LIVING.....070	SOUTH.....113
DEPARTMENT.....026	LOBBY.....071	SPACE.....114
DETECTOR.....027	LOW.....072	STAIRS.....115
DINING.....028	MAID'S.....073	TEMPERATURE.....116
DOOR.....029	MAIL.....074	TEN.....117
DOWNSTAIRS.....030	MASTER.....075	THIRD.....119
EAST.....031	MOTHER'S.....076	THIRTEEN.....120
EIGHT.....033	NINE.....229	THIRTY.....126
EIGHTEEN.....034	NINETEEN.....079	THREE.....121
EIGHTH.....035	NINETY.....078	TROUBLE.....122
EIGHTY.....036	NINTH.....077	TROUBLES.....123
ELEVEN.....032	NORTH.....080	TWELVE.....118
ENTRY.....037	NUMBER.....081	TWENTY.....124
EXECUTIVE.....038	OFF.....083	TWO.....125
EXIT.....039	OFFICE.....084	UPSTAIRS.....127
FAILURE.....040	ON.....082	UTILITY.....128
FAMILY.....041	ONE.....230	WAREHOUSE.....129
FATHER'S.....042	OPEN.....085	WEST.....130
FIFTEEN.....043	PLAY.....086	WINDOW.....131
FIFTH.....044	PORCH.....087	WING.....132
FIFTY.....045	PRIORITY.....088	WORKSHOP.....133
		YARD.....134

### FEATURES

- Access/command system from any TouchTone phone
- Voice prompted for user-friendly operation
- Smart, menu-driven "YES/NO" format
- Over 250 voice synthesized descriptors
- Answering machine bypass
- 3 programmable control outputs for home automation
- Uncompromised security using ID and access codes in addition to existing system codes
- Wizard II compatible with Gemini GEM-P9600, GEM-P3200 and GEM-P1632 panels
- Original Wizard compatible with MA854, MA1000e, MA1008, MA1008e, MA1010, MA1016, MA1016e Panels
- Easy installation

### SPECIFICATIONS

- **Operating Voltage:** 12Vdc (nominal), supplied by panel
- **Current:** *Standby*, 60mA + Control Output Currents.  
*Local Active*, 130mA + Control Output Currents.  
*Remote Active*, 95mA + Control Output Currents.
- **Control Outputs (1, 2, 3):** 12 Vdc, active low, 25mA maximum
- **Dimensions:** 6.5"L x 4.75"W x 1.5"H
- **Telephones:** Touch-Tone compatible. (Phones that can only dial rotary will not be able to operate the host panel)

### INSTALLATION

The module is self-contained to simplify mounting inside or outside the panel enclosure. If mounting inside the enclosure, the unit may be affixed to the rear wall using double-sided adhesive pads. If mounting outside the enclosure, use two #10 screws to secure the unit to any flat surface.

### ORDERING INFORMATION

- WIZARD II** Talking Module for *Gemini* Series
- WIZARD** Talking Module for *Magnum Alert* Series
- RB1000** *Optional* Low Current Dry Closure Relay Module (SPDT;12V for 2A/24V, max.)
- WI833** Work Instructions for WIZARD II
- WI756** Work Instructions for WIZARD



"WIZARD" is a trademark of NAPCO.

© 1997, NAPCO Security Systems, Inc.  
333 Bayview Avenue, Amityville, NY 11701