


WIRELESS EMERGENCY LINE


Patent Pending - Part #WEL-R

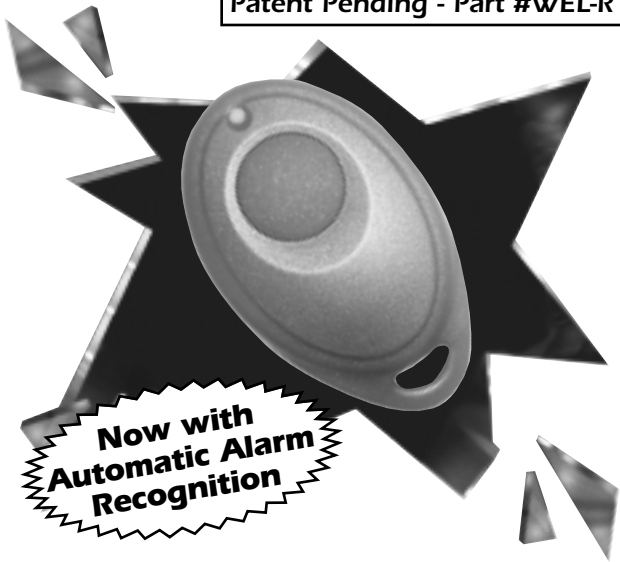

Installation Manual Street Smart Security

Installation

- Red Aux +
- Black Aux -
- Yellow Keypad Data Line (Connect to Caddx KP DATA and GREEN from Gem P400, 600 and 800)
- Green Keypad Data Line (Not used on Caddx and Napco Gem P400, 600, 800)

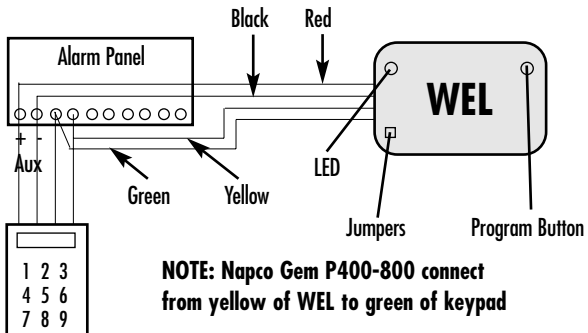

NOTE: Napco Gem P400-800 connect from yellow of WEL to green of keypad

Alarm Keypad


Options

Optional 2 button remote for both Medical and Police on one remote.
Part # CEREM2



Wireless Emergency Line

Location of the control module is the most important determining factor for range and reliability of your Wireless Emergency Line. Select a location that is as centrally located as possible. Keep in mind that your customer will want to control the operation of the garage door from the driveway, and will also expect the use of the remote for alarm On/Off in the area of entry and exit.

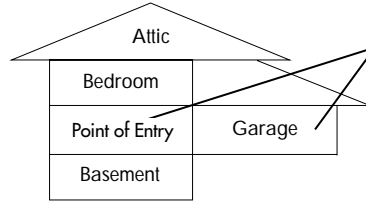

Recommended placement for Wireless Emergency Line

Although you can wire at the panel, it may reduce labor and increase range by installing the Wireless Emergency Line receiver at the point of entry or near a keypad.

Specifications

RECEIVER

- 12VDC Power Input
- Selectable: Form C Relay (N/O, N/C, Comm) 5amp
- Channel 1 - Keypad panic data output (Programmable Medical/Panic)

Frequency 303Mhz

Stand by Power Consumption 15ma

Temperature Range -5°F to 160°F (Indoor use only)

REMOTE CONTROL

- Battery (2) CR1616Lithium
- Range 75-100 feet

Wiring and Auto Recognition

COMPLETE STEPS 1-5

- Step 1)** Unplug the receiver from the wire harness.
- Step 2)** Wire the Red, Black, Yellow and Green to the keypad. (Some panels may only use 3 wires, refer to page 2, 3 for Caddx and Napco Gem P400, P600, P800.)

- RED Connect to Keypad Red or Aux (+)
- BLACK Connect to Keypad Black or Aux (-)
- GREEN Connect to Keypad Green (Not used on Caddx and Napco Gem P400, P600 and P800)
- YELLOW Connect to Keypad Yellow. For Caddx connect to KP DATA. (For Napco Gem P400, P600 and P800 connect yellow from WEL to green of keypad.)

NOTE: You can make these connections at the panel or at the keypad itself. If you place the Wireless Emergency Line in the garage or any other location away from the panel you may choose to wire the Wireless Emergency Line directly to the keypad.

- Step 3)** Make sure the alarm panel is powered up and operating.
- Step 4)** While watching the LED light on the Control module, plug the receiver into the Wireless Emergency Line harness.
- Step 5)** The LED will blink 1 time on power up, after 2 seconds COUNT the flashes that you see. The corresponding flashes will indicate which panel the Wireless Emergency Line has detected.

Wiring Diagram

Green	Connect to green of keypad (Not used on Caddx or Napco Gem P400, P600, P800, Express 400, 600)
Yellow	Connect to yellow of keypad (Caddx connect to KP DATA) IMPORTANT: For Napco Gem P400, P600, P800 and Express 400, 600 connect the yellow from the WEL to the green of the keypad.
Brown	Relay Common (5amp)
Brown/White	Relay N/O (5amp)
Blue/Green	Relay N/C (5amp)
Red	+12VDC
Black	(-) Ground

**Napco Gem P400-800
SEE SPECIAL WIRING**



Press and release for relay mode, press and hold for 3 seconds for PANIC output. Relay can be wired to any zone for an additional panic output.

Programming the WEL

To change from Panic to Medical or to change from Delay to Instant activation locate the two jumpers next to the wire harness.

- Jumper closest to the harness IN (Default) Panic
- Jumper closest to the harness removed Medical
- Jumper farthest from the harness IN (Default) Delay Activation
- Jumper farthest from the harness removed Instant Activation

Automatic Recognition Continued:

No. of Flashes	Alarm Panel detected by the Wireless Emergency Line
1	No Alarm connected (WEL defaults to relay mode) SEE PAGE 7 "Default Mode"
2	FBI using a 4600 style keypad
3	FBI using a 4612 style keypad
4	FBI using an addressable keypad SEE PAGE 8
5	Napco 1632, 3200, 9600, P816
6	Caddx NX4, NX6, NX8
7	Napco Gem P400, P600, P800, Express 400, 600

NOTE: If the WEL does not detect correctly, call Technical Toll Free 888-768-2846 7am-5pm PST

* Please verify the panel is programmed for keypad PANIC or Medical, whichever is being used.

The WEL on the following panels self enrolls as a specific keypad address code.

- Napco 1632, 3200, 9600 Address #2
- FBI Addressable Address #8 - SEE PAGE 8

DO NOT USE THIS ADDRESS CODE FOR ANY KEYPAD. EXAMPLE: If you are using an Napco 1632, no keypads can use address #2 since the WEL will automatically enroll itself as address #2.

Napco 1632, 3200 and 9600 panels must programmed for a second keypad. For PANIC, you must program that feature "ON" for keypad #2. The second keypad must be programmed to area #1 for the WEL to operate.

- 1632 Address 0724 (*1) and Address 0731 (*4)
- 3200 Address 2426 (*1) and Address 2441 (*4)
- 9600 Address 2426 (*1) and Address 2441 (*4)

Relay Application

Press and Release button
Press and Hold button 3 for seconds

Relay Output
Panic Mode

Relay Output

This output is a 5amp Form C relay (Common, N/O/, N/C). To energize relay, press and release remote button. You must RELEASE the button before the relay will energize. This can be wired to any zone for any response type.

To Add or Delete Remotes

TO ADD A NEW REMOTE

To add a remote to your Wireless Emergency Line **PRESS AND RELEASE** the program button on the receiver. The light on the receiver will come **ON**. Immediately **PRESS** the button on the new remote control **THREE TIMES**. The light on the receiver should go **OFF**, indicating the remote has been learned. If the light on the receiver stays **ON**, the remote has not been learned. Remove and replace the harness, wait 15 seconds while auto recognition occurs and follow these instructions again.

The WEL can hold up to seven remotes.

TO DELETE ALL REMOTES

To delete a lost or stolen remote from the Wireless Emergency Line, you must purge the entire memory. This will delete all of the current remotes. You will then have to add them back into memory. To purge, **PRESS AND HOLD** the program button, the light will come ON for four seconds, then go OFF, and finally it will come ON again, indicating that all the remotes in memory have been purged. Release the program button and follow the instructions above (To Add a New Remote).

6

Street Smart Limited Warranty

Street Smart, a Division of Pittway Corporation, and its divisions, subsidiaries and affiliates ("Seller"), 12800 Brook Printer Place, Poway, California 92064, warrants its products to be in conformance with its own plans and specifications and to be free from defects in materials and workmanship under normal use and service for 24 months from the date stamp control on the product or, for products not having a Street Smart date stamp, for 12 months from date of original purchase unless the installation instructions or catalog sets forth a shorter period, in which case the shorter period shall apply. Seller's obligation shall be limited to repairing or replacing, at its option, free of charge for materials or labor, any product which is proved not in compliance with Seller's specifications or proves defective in materials or workmanship under normal use and service. Seller shall have no obligation under this Limited Warranty or otherwise if the product is altered or improperly repaired or serviced by anyone other than Street Smart factory service. For warranty service, return product transportation prepaid, to Street Smart Factory Service, 12800 Brook Printer Place, Poway, California 92064.

THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE, WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. IN NO CASE SHALL SELLER BE LIABLE TO ANYONE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, OR UPON ANY OTHER BASIS OR LIABILITY WHATSOEVER, EVEN IF THE LOSS OR DAMAGE IS CAUSED BY THE SELLER'S OWN NEGLIGENCE OR FAULT.

Seller does not represent that the products it sells may not be compromised or circumvented; that the products will prevent any personal injury or property loss by burglary, robbery, fire or otherwise; or that the products will in all cases provide adequate warning or protection. Customer understands that a properly installed and maintained alarm may only reduce the risk of a burglary, robbery, fire or other events occurring without providing an alarm, but it is not insurance or a guarantee that such will not occur or that there will be no personal injury or property loss as a result. CONSEQUENTLY, SELLER SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE OR OTHER LOSS BASED ON A CLAIM THE PRODUCT FAILED TO GIVE WARNING. HOWEVER, IF SELLER IS HELD LIABLE, WHERE DIRECTLY OR INDIRECTLY, FOR ANY LOSS OR DAMAGE ARISING UNDER THIS LIMITED WARRANTY OR OTHERWISE, REGARDLESS OF CAUSE OR ORIGIN, SELLER'S MAXIMUM LIABILITY SHALL NOT IN ANY CASE EXCEED THE PURCHASE PRICE OF THE PRODUCT, WHICH SHALL BE THE COMPLETE AND EXCLUSIVE REMEDY AGAINST SELLER. This warranty replaces any previous warranties and is the only warranty made by Seller or this product. No increase or alteration, written or verbal, of the obligations of this Limited Warranty is authorized.


9

DEFAULT MODE:

- If the WEL fails to recognize any of the data coming from the keypad wires, it will automatically default to a relay mode for button #1
- If this happens, verify that you are properly wired to one of the alarms listed on page 5.
- If you have connected the WEL to an alarm it does not recognize, follow the wiring below to set relay to a zone programmed for panic.
- Program a selected zone as "Keystwitch Arming."
- Do not use the green or yellow wires.

Hardwiring a Zone

Red	Aux +
Black	Aux -
Brown/White	Zone programmed for any response (Panic/Medical)
Brown	Common adjacent to zone

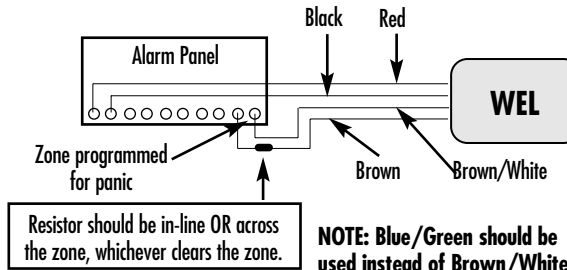

7

FBI Addressable Keypads

- When using an addressable keypad like an XK-7LC, XK-5LC, XK-508, XK-512, XK-516, XK-708, XK-716 you may have to complete an extra step before the WEL will operate.
- These FBI panels poll for addressable or non addressable keypads upon power up OR after you exit programming. Since the WEL requires that you plug it in after the FBI is powered up, it misses that polling loop.

TO have the FBI panel Re-Poll for keypads and WEL units

Step 1) Enter Programming Mode: Press "CODE" + "*" and installers code (2468 default) followed by a "1".

Step 2) Exit Programming by pressing the "STAY" key.

Step 3) The WEL will enroll itself as an Addressable Keypad at address #8

Troubleshooting

PROBLEM: I press and hold button on remote but there is no panic.

SOLUTION: 1) Make sure the panel is programmed to accept keypad panic

2) Verify that the remote is programmed into the WEL module.

GO TO page 6 and teach the remote.

3) Is the panel programmed for Silent Panic? Maybe it is operating but you are not hearing it.

4) Is the panel programming to accept extra keypads?

See page 5 for Napco/FBI.

STREET SMART SECURITY TECHNICAL CAN BE REACHED AT:

12800 Brook Printer Place, Poway, CA 92064

M-F 7AM-5PM PST AT (888) 768-2846 OR (619) 513-9352-FAX 8

Federal Communications Commission (FCC) Statement

This equipment has been tested to FCC requirements and has been found acceptable for use. The FCC requires the following statement for your information:

This equipment generates and uses radio frequency energy and if not installed and used properly, that is, in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. It has been type tested and found to comply with the limits for a Class B computing device in accordance with the specifications in Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interferences to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- If using an indoor antenna, have a quality outdoor antenna installed.
- Reorient the receiving antenna until interference is reduced or eliminated
- Move the receiver away from the control/communicator.
- Move the antenna leads away from any wire runs to the control/communicator.
- Plug the control/communicator into a different outlet so that it and the receiver are on different branch circuits.

If necessary, the user should consult the dealer or an experienced radio/television technician for additional suggestions.

The user or installer may find the following booklets prepared by the Federal Communications Commission helpful: "Interference Handbook"

This booklet is available from the U.S. Government Printing Office, Washington, DC 20402. The user shall not make any changes or modifications to the equipment unless authorized by the installation instructions or User's Manual. Unauthorized changes or modifications could void the user's authority to operate the equipment.

10

Canadian Department of Communications (DOC) Statement

NOTICE: The Canadian Department of Communications label identifies certified equipment. This certification means that the equipment meets certain telecommunications network protective, operational and safety requirements. The Department does not guarantee the equipment will operate to the user's satisfaction. Before installing this equipment, users should ensure that it is permissible to be connected to the facilities of the local telecommunications company. The equipment must also be installed using an acceptable method of connection. In some cases, the company's inside wiring associated with a single line individual service may be extended by means of certified connector assembly (telephone extension cord). The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be made by an authorized Canadian maintenance facility designed by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user to disconnect the equipment.

Users should ensure for their own protection that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe system, if present, are connected together. This precaution may be particularly important to rural areas.

CAUTION: User should not attempt to make such connections themselves, but should contact the appropriate electric inspection authority, or electrician, as appropriate.

The Load Number (LN) assigned to each terminal device denotes the percentage of the total load to be connected to a telephone loop which is used by the device, to prevent overloading. The termination on a loop may consist of any combination of devices subject only to the requirement that the total of the Load Numbers of all the devices does not exceed 100.

11