


NX-475 Water-Resistant Pendant Panic Button

Document Number: 466-1477 Rev. A
August 1997

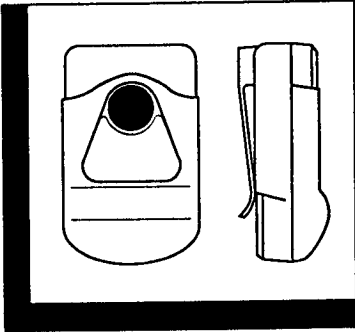

INSTALLATION INSTRUCTIONS

Product Summary

The NX-475 Water-Resistant Panic Button can be used throughout the premises for police, medical, or auxiliary alarm activation. When the sensor button is pressed, the built-in transmitter sends a signal to the panel.

The water-resistant design helps prevent damage in case the sensor accidentally gets wet.

Installation Considerations

Use the following guidelines when installing this button.

- The transmitter in the button has an open-air range of up to 1,000 ft., but the installation environment may influence this range.
- The 3.5 VDC lithium battery will last at least 12 months.

Programming

Refer to the *NX Series Receiver Modules Installation Instructions* for programming procedures.

Testing

- 1) Set the system to the test mode or contact the central monitoring service and inform them you are testing and authorities should not be dispatched.
- 2) Press the button on the sensor and listen for system response.
- 3) Test the sensor from several locations within the premises to check for consistent response.
- 4) Contact the central monitoring service when testing is finished.

Replacing the Sensor Battery

- 1) Disassemble the sensor by removing the two screws on the back of the sensor and separate the front and back plastic.

WARNING: You must be free of all static electricity before handling the transmitter circuit board. Touch a grounded, bare metal surface before touching the circuit board, or wear a grounding strap.

- 2) Remove the old battery from its holder and install the new battery, observing polarity.

WARNING: Install only the same size and type battery. Do not substitute another size or type battery.

- 3) Reassemble the sensor.

Note: Be sure to assemble the sensor correctly to ensure water resistance. Be especially careful not to nick or damage the rubber gasket lining.

- 4) Test the sensor to verify correct operation.

Lithium Battery Disposal

Lithium batteries that are no longer usable are considered hazardous waste. Be sure to properly dispose of the old battery. Contact your local city government for hazardous waste disposal laws.

Specifications

Power Source: 3.6 VDC Saft Lithium Battery

Enclosure: Water-Resistant and Shock-Resistant

Dimensions (L x W x D): 2-1/4" x 1-3/4" x 3/4"


Notices

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- 1) This device may cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by Interactive Technologies, Inc. can void the users' authority to operate the equipment.

US Patents 4,855,713, 4,864,636, and others pending.

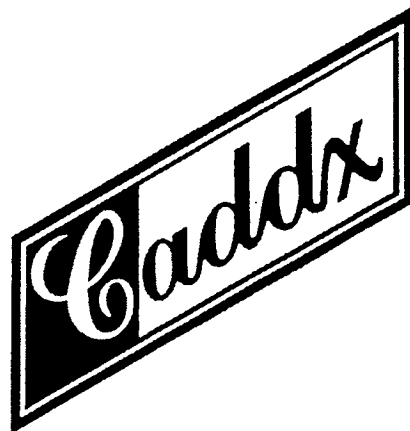

Caddx Controls, Inc.
1420 North Main Street
Gladewater, Texas 75647
Toll Free: 1-800-727-2339
FAX: (903) 845-6811

Caddx is a registered trademark of Caddx Controls, Inc.