


1

Power and Phone Line Hookup

A. Locate a convenient location near both a phone line and an electrical outlet. Make sure the power outlet cannot be switched off with a wall switch.



B. Plug the large end of the included phone cord into the LINE jack on the back of the base unit. The small end of this cord goes into the wall phone jack.

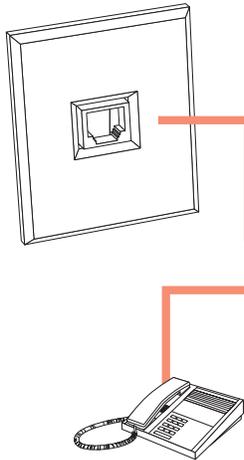

C. Plug your phone or answering machine into the phone jack on the back of the base unit.



D. Plug Transformer in.

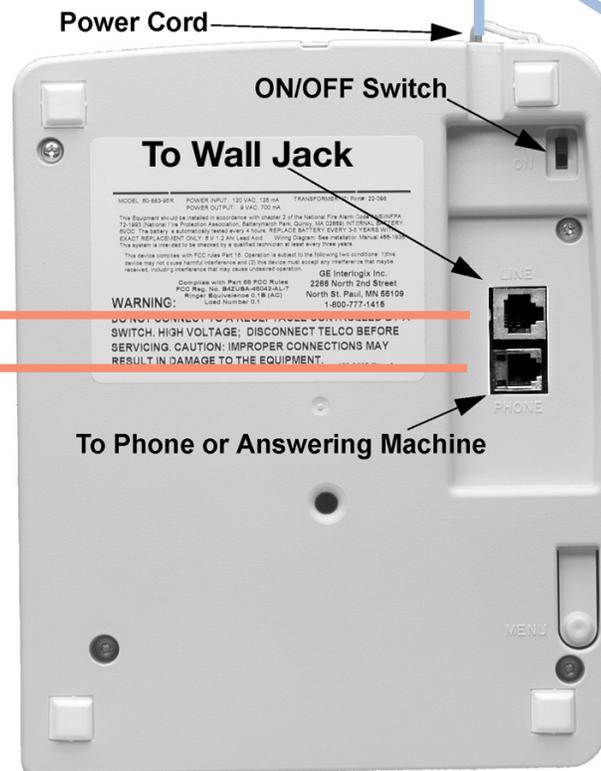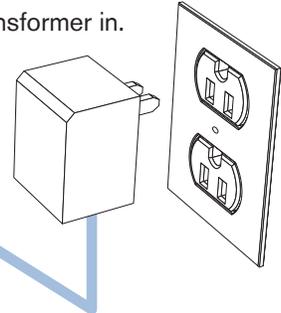

E. Turn the Power switch located the back of the panel to ON. The base unit voice announces "Hello, system is OK", and the "Home Away/Power" light turns on.

Note: If you have an extension phone on the same line as your CareGard you will need a LineGrabber device to ensure the phone line remains free. (See enclosed "Hooking up the LineGrabber" sheet in this packet for further information).

2

Testing Your System

This test is to be done to confirm the activation of your Aegis Monitoring Service.

- After your monitoring service form has been sent in and processed by Aegis, then call this toll-free number to test your system. **1-800-631-2299**. Have your **account number** available. Tell the operator you wish to do a **"2-Way Voice Test"**.
- Push the button on your Panic Sensor.
- In about 10 seconds you will hear, *"contacting monitoring station, please remain calm"*.
- Once contact has been made you will hear the Operator at the The Aegis Monitoring Center speak over your Base Unit's speaker. You will reply by talking into your CareGard Base Unit. Your CareGard operates as a speaker-phone!!
- Tell the Operator to take your account "off test".
- Well done! Your system is now fully tested and ready to use!

Aegis Monitoring Center
800-631-2299

Customer Service
866-360-1402 (extension 12)
customerservice@aegiswireless.com

Technical Support
866-494-0255
technicalsupport@aegiswireless.com

<http://www.aegiswireless.com>
Click on button: FAQ/Help

Corporate Office
Aegis Wireless Security, LLC
P.O. Box 306
Lake Oswego, OR 97034


corporate@aegiswireless.com

Adding/Replacing Sensors to CareGard™


CareGard allows up to 24 panic sensors to be added to your system. It is a very simple and easy process. If you have purchased an **additional** wrist or pendant sensor and wish to add it to your system, just follow the simple steps below. And remember, all kits come with one wrist sensor that was enclosed in the kit and it is already enrolled in your system. It does not have to be added using the steps below. Only if you have purchased **additional panic sensors** are the steps below necessary.

Procedure for Adding/Replacing a Panic Sensor

1. Press the **Menu button** on the back of the CareGard base unit until the panel announces "Add sensor. Press status to select".

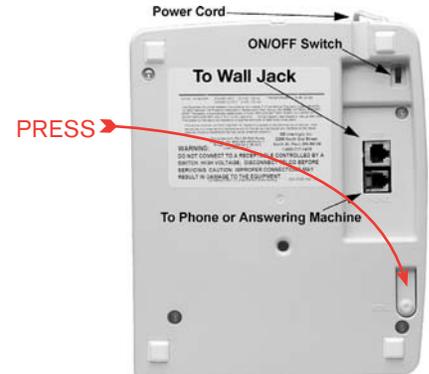

2. Press the **Status button** on the front of the CareGard base unit.

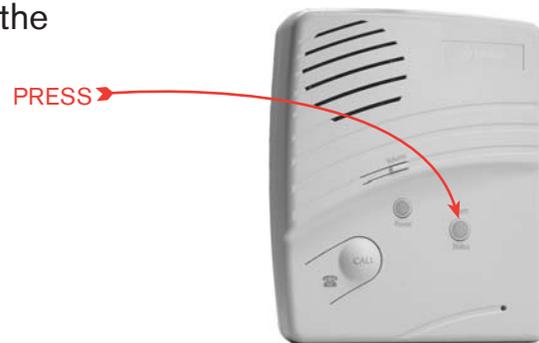

3. Press the **panic sensor button**. (You have 8 seconds to do this.) The panel will announce "Press status to accept panic sensor."



4. Press **Status button** when prompted.
5. That's it!! Your sensor has been added. This may be repeated as many times as needed to add sensors to your CareGard.