

Wireless Automator



WA6R

Wireless Automator comes with 6 programmable form-C relays.

This universal receiver can be used for lighting control, key switch arm/disarm, garage doors, magnetic locks, security gates or any other item that can be controlled by a relay.

Convenience

- Simple connection- each relay has separate color matched wires.
- Each relay is preprogrammed for validity.
- Control anything that can be activated by relay.

Peace of Mind

- 4 Billion Encrypted Codes allow you to control any device without giving up security.
- Miniature design – small remote for key chain.
- One remote can work on multiple receivers (i.e. One receiver on your home, one for your business).

Function

- Powered by 12v – included transformer or auxiliary.
- Unit will default to validity mode.
- Each relay has 8 different options (see chart).
- Multiple buttons can control same relay/one button multiple relays.
- Extra Remotes: CEREMWA. Add up to 7 remotes to one receiver.

Ideal for use with:

**HAI
Apex**

Centralite

**OnQ
Leviton**


6 Form-C Relays

Normally OPEN or normally CLOSED.

8 Different settings for each relay:

- Momentary
- Latching
- Validity
- 30 second timed
- 1 minute timed
- 5 minute timed
- 20 minute timed
- Strobe (.5 Second On, .5 Second Off)

REMOTE FUNCTIONS

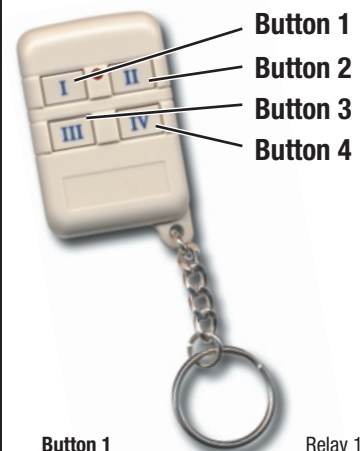

Button 1	Relay 1
Button 2	Relay 2
Button 3	Relay 3
Button 4	Relay 4
Button 1 & 2 (simultaneously)	Relay 5
Button 3 & 4 (simultaneously)	Relay 6