

## USING YOUR 2WAY-UNIVKF KEYFOB

### Controls

The KeyFob's 4 command buttons provide complete system control. Commands are issued to the alarm system by either pressing or holding down (for 2 seconds) the appropriate button.



**STATUS**

Press **STATUS** to update the display with the current system status.

The proper icon(s) will appear, accompanied by the appropriate beep(s). (see Audible Indicators)

The icon(s) will automatically go out in about 6 seconds.

**ON/OFF**

Press **ON/OFF** to arm or disarm the alarm system. Hold Down **ON/OFF** to Arm the system in STAY mode.

**PANIC**

Hold Down **PANIC** for 2 seconds to activate a panic alarm.

**ON/OFF**

AND

**\***

Press **ON/OFF** and **\*** simultaneously for:

---



---



---

The KeyFob antenna may be extended for increased operating

**\***

Press **\*** for:

---



---



---

Hold Down **\*** for 2 seconds for:

---



---



---


### Audible Indicators

For each command issued, the KeyFob will give feedback beep(s) to confirm that it has been acknowledged by the system.

# of Beeps	State
1	Armed
2	Disarmed
3	Armed, Stay mode
4	Armed, zones bypassed
5	System Trouble
6... (repeats)	Alarm !


## Visual LCD Indicators

The 2WAY-UNIVKF uses a series of icons to convey the status of the † system. Each time the STATUS button is pressed, or any command is issued, the appropriate icon(s) will display for about 6 seconds. For example, if ON/OFF is pressed to arm the system, the Armed Icon will light in a few seconds to confirm that the command was successfully carried out. Below is a description of each icon indicator. Please note that the icons marked “†” are optional and may not apply to all systems.

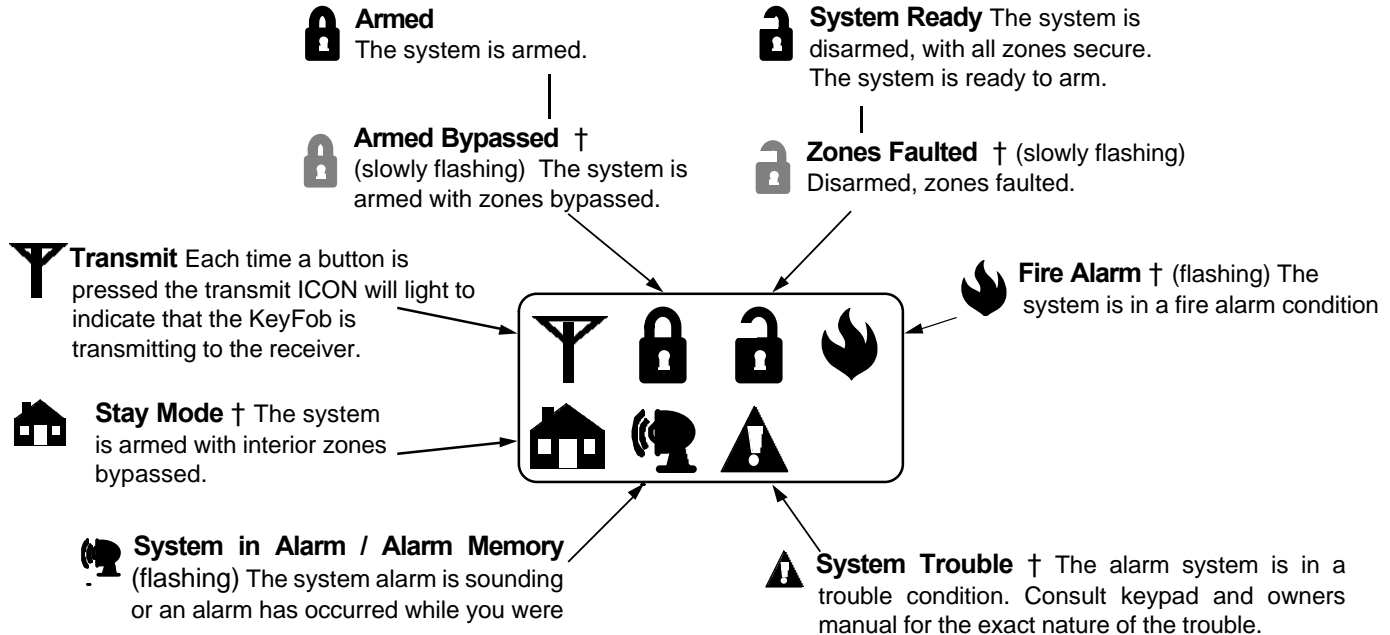

## Enrolling and Removing KeyFobs

Each KeyFob used in the system must be enrolled into the receiver using the following procedure:

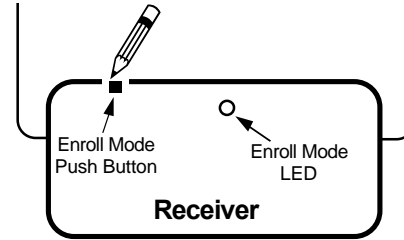

- 1 Use a pen or pencil to depress and hold the recessed Enroll Mode Push Button on the top of the receiver. → Entered Enroll Mode - The Enroll Mode LED will continue to flash.  
Release when the Enroll Mode LED begins to flash.
- 2 Press the \* button on KeyFob 1. → The KeyFob will sound a confirmation beep.
- 3 Press the \* button on KeyFob 2 (if more than one). → The KeyFob will sound a confirmation beep.
- ... Repeat for each KeyFob to be programmed into system.
- Press Enroll Mode Push Button or **ON/OFF** on KeyFob. → Exit Enroll Mode - the Enroll Mode LED will go out.

**To remove a lost KeyFob from the system:** Enter and then exit the Keyfob Enroll Mode. (Hold down Enroll Mode Push Button until Enroll Mode LED flashes, release and then hold down again to exit Enroll Mode). All keyfobs will be deleted from system.

## Changing the KeyFob battery

1 Open battery compartment on back of Keyfob.



2 Remove old battery and replace with new.



3 Replace battery compartment cover

Note: There is no need to re-enroll the KeyFob after a battery change.

**Use only AAA 1.5 Volt alkaline battery.**

# NAPCO LIMITED WARRANTY

NAPCO SECURITY SYSTEMS, INC. (NAPCO) warrants its products to be free from manufacturing defects in materials and workmanship for thirty-six months following the date of manufacture. NAPCO will, within said period, at its option, repair or replace any product failing to operate correctly without charge to the original purchaser or user.

This warranty shall not apply to any equipment, or any part thereof, which has been repaired by others, improperly installed, improperly used, abused, altered, damaged, subjected to acts of God, or on which any serial numbers have been altered, defaced or removed. Seller will not be responsible for any dismantling or reinstallation charges.

THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. THERE IS NO EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY OR A WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. ADDITIONALLY, THIS WARRANTY IS IN LIEU OF ALL OTHER OBLIGATIONS OR LIABILITIES ON THE PART OF NAPCO.

Any action for breach of warranty, including but not limited to any implied warranty of merchantability, must be brought within the six months following the end of the warranty period.

IN NO CASE SHALL NAPCO BE LIABLE TO ANYONE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, EVEN IF THE LOSS OR DAMAGE IS CAUSED BY THE SELLER'S OWN NEGLIGENCE OR FAULT.

In case of defect, contact the security professional who installed and maintains your security system. In order to exercise the warranty, the product must be returned by the security professional, shipping costs prepaid and insured to NAPCO. After repair or replacement, NAPCO assumes the cost of returning products under warranty. NAPCO shall have no obligation under this warranty, or otherwise, if the product has been repaired by others, improperly installed, improperly used, abused, altered, damaged, subjected to accident, nuisance, flood, fire or acts of God, or on which any serial numbers have been altered, defaced or removed. NAPCO will not be responsible for any dismantling, reassembly or reinstallation charges.

This warranty contains the entire warranty. It is the sole warranty and any prior agreements or representations, whether oral or written, are either merged herein or are expressly canceled. NAPCO neither assumes, nor authorizes any other person purporting to act on its behalf to modify, to change, or to assume for it, any other warranty or liability concerning its products.

In no event shall NAPCO be liable for an amount in excess of NAPCO's original selling price of the product, for any loss or damage, whether direct, indirect, incidental, consequential, or

otherwise arising out of any failure of the product. Seller's warranty, as hereinabove set forth, shall not be enlarged, diminished or affected by and no obligation or liability shall arise or grow out of Seller's rendering of technical advice or service in connection with Buyer's order of the goods furnished hereunder.

NAPCO RECOMMENDS THAT THE ENTIRE SYSTEM BE COMPLETELY TESTED WEEKLY.

**Warning:** Despite frequent testing, and due to, but not limited to, any or all of the following; criminal tampering, electrical or communications disruption, it is possible for the system to fail to perform as expected. NAPCO does not represent that the product/system may not be compromised or circumvented; or that the product or system will prevent any personal injury or property loss by burglary, robbery, fire or otherwise; nor that the product or system will in all cases provide adequate warning or protection. A properly installed and maintained alarm may only reduce risk of burglary, robbery, fire or otherwise but it is not insurance or a guarantee that these events will not occur. CONSEQUENTLY, SELLER SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE, OR OTHER LOSS BASED ON A CLAIM THE PRODUCT FAILED TO GIVE WARNING. Therefore, the installer should in turn advise the consumer to take any and all precautions for his or her safety including, but not limited to, fleeing the premises and calling police or fire department, in order to mitigate the possibilities of harm and/or damage.

NAPCO is not an insurer of either the property or safety of the user's family or employees, and limits its liability for any loss or damage including incidental or consequential damages to NAPCO's original selling price of the product regardless of the cause of such loss or damage.

Some states do not allow limitations on how long an implied warranty lasts or do not allow the exclusion or limitation of incidental or consequential damages, or differentiate in their treatment of limitations of liability for ordinary or gross negligence, so the above limitations or exclusions may not apply to you. This Warranty gives you specific legal rights and you may also have other rights which vary from state to state.



FCC ID: AD82WAYUNIVKF

This device complies with part 15 of the FCC Rules. Operation is subject to the following:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.