



## Napco T1000PIR Transmitter

NAPCO SECURITY SYSTEMS, INC.  
333 BAYVIEW AVENUE  
AMITYVILLE, NEW YORK 11701

© Napco 1994

WI713 3/94

### GENERAL DESCRIPTION

The T1000PIR is a wireless PIR transmitter designed for use in Napco Super Spectrum™ wireless systems. The T1000PIR receives power from one Duracell Type DL223A 6-volt lithium battery, which can power the transmitter for 3 to 5 years. Should battery voltage drop below 5 volts, a low-battery report will be sent with any status, alarm, or test report to the receiver.

Coding switches are not used in the T1000PIR. Each transmitter has a unique factory-programmed code that distinguishes itself to the receiver. **Note:** The DIP switches and jumpers inside the unit are preset at the factory and require no further attention. (If inadvertently changed, refer to diagram silk-screened on board to restore factory settings; DIP switches are ON when right side is depressed.)

### SPECIFICATIONS

*Number of Zones:* 15 (three layers: 7/7/1)

*Maximum Coverage:* 40' long x 40' wide


*Operating Temperature:* -10° to +50° C (14° to 122° F)

*Mounting:* Wall or corner

*Recommended Mounting Height:* 6' to 8'

*Maximum Mounting Height:* 12'

*Dimensions:* 5.5" x 3.25" x 2.4" (HxWxD)

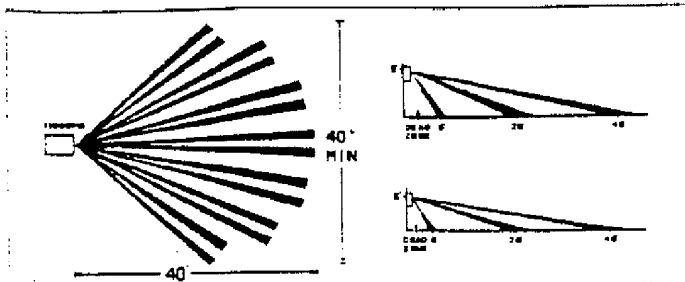

### INSTALLATION

1. Remove the center Lock Screw to remove the circuit board. Install the battery *flat side up*, then replace the circuit board.
2. Press the Walk-Test Button at the top-left corner of the board. This will enable the Walk-Test Mode for three minutes.
3. Replace the front cover and place the unit face down on a bench.
4. Place the R1000 Receiver into the Learn Mode. Refer to R1000 installation instructions WI604.
5. Turn the unit over to activate the PIR. A beep at the keypad will confirm that the unit has been learned.
6. Mount the unit. Set the Height Scale at the right side of the board at the index in the case for the mounting height of the unit.
7. Walk-test the unit. Press the Walk-Test Button as needed to reactivate the 3-minute Walk-Test Mode. The LED will remain off after the Walk-Test time has elapsed.

For Sales, Repairs or Technical Service,  
Call Toll Free: (800) 645-9445  
Technical Service Direct Line: (800) 645-9440

### NAPCO LIMITED WARRANTY

NAPCO SECURITY SYSTEMS, INC. (NAPCO) warrants its products to be free from manufacturing defects in materials and workmanship for thirty-six months following the date of manufacture. NAPCO will, within said period, at its option, repair or replace any product failing to operate correctly without charge to the original purchaser or user.

This warranty shall not apply to any equipment, or any part thereof, which has been repaired by others, improperly installed, improperly used, abused, altered, damaged, subjected to acts of God, or on which any serial numbers have been altered, defaced or removed. Seller will not be responsible for any dismantling or reinstallation charges.

In case of defect, contact the security professional who installed and maintains your security system. NAPCO shall have no obligation under this warranty, or otherwise, if the product has been repaired by others, improperly installed, improperly used, abused, altered, damaged, subjected to accident, nuisance, flood, fire or acts of God, or on which any serial numbers have been altered, defaced or removed. NAPCO will not be responsible for any dismantling, reassembly or reinstallation charges.

In order to exercise the warranty, the product must be returned by the security professional, shipping costs prepaid and insured to NAPCO. After repair or replacement, NAPCO assumes the cost of returning products under warranty.

There are no warranties, express or implied, which extend beyond the description on the face hereof. There is no express or implied warranty of merchantability or a warranty of fitness for a particular purpose. Additionally, this warranty is in lieu of all other obligations or liabilities on the part of NAPCO.

Any action for breach of warranty, including but not limited to any implied warranty of merchantability, must be brought within the six months following the end of the warranty period. In no case shall NAPCO be liable to anyone for any consequential or incidental damages for breach of this or any other warranty, express or implied, even if the loss or damage is caused by the seller's own negligence or fault.

This warranty contains the entire warranty. It is the sole warranty and any prior agreements or representations, whether oral or written, are either merged herein or are expressly cancelled. NAPCO neither assumes, nor authorizes any other person purporting to act on its behalf to modify, to change, or to assume for it, any other warranty or liability concerning its products.

In no event shall NAPCO be liable for an amount in excess of NAPCO's original selling price

of the product, for any loss or damage, whether direct, indirect, incidental, consequential, or otherwise arising out of any failure of the product. Seller's warranty, as hereinabove set forth, shall not be enlarged, diminished or affected by and no obligation or liability shall arise or grow out of Seller's rendering of technical advice or service in connection with Buyer's order of the goods furnished hereunder.

#### NAPCO RECOMMENDS THAT THE ENTIRE SYSTEM BE COMPLETELY TESTED WEEKLY.

Warning: Despite frequent testing, and due to, but not limited to, any or all of the following: criminal tampering, electrical or communications disruption, it is possible for the system to fail to perform as expected. NAPCO does not represent that the product/system may not be compromised or circumvented; or that the product or system will prevent any personal injury or property loss by burglary, robbery, fire or otherwise; nor that the product or system will in all cases provide adequate warning or protection. A properly installed and maintained alarm may only reduce risk of burglary, robbery, fire or otherwise but it is not insurance or a guarantee that these events will not occur. CONSEQUENTLY, SELLER SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE, OR OTHER LOSS BASED ON A CLAIM THE PRODUCT FAILED TO GIVE WARNING. Therefore, the installer should in turn advise the consumer to take any and all precautions for his or her safety including, but not limited to, fleeing the premises and calling police or fire department, in order to mitigate the possibilities of harm and/or damage.

NAPCO is not an insurer of either the property or safety of the user's family or employees, and limits its liability for any loss or damage including incidental or consequential damages to NAPCO's original selling price of the product regardless of the cause of such loss or damage. If the user wishes to protect itself to a greater extent, NAPCO will, at user's sole cost and expense, obtain an insurance policy to protect the user, supplemental to user's own policy, at a premium to be determined by NAPCO's insurer upon written notice from user by Certified Mail, Return Receipt Requested, to NAPCO's home office address, and upon payment of the annual premium cost by user.

Some states do not allow limitations on how long an implied Warranty lasts or do not allow the exclusion or limitation of incidental or consequential damages, or differentiate in their treatment of limitations of liability for ordinary or gross negligence, so the above limitations or exclusions may not apply to you. This Warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Super Spectrum™ is a trademark of Napco Security Systems, Inc.