


# Simon Version 1 Rechargeable Battery Kit

## Installation Instructions

Document Number: 466-1635 Rev. A  
December 1998

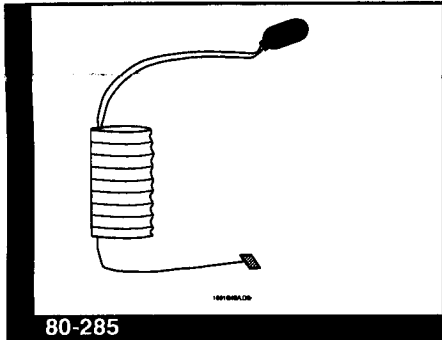

**Note:** Unplug the transformer before starting this process.


### Tool Needed

- Screw driver

## Installation Instructions

Use the following guidelines for installing the rechargeable battery into Simon Version 1 Control Panels.

1. Open the Control Panel Door by pressing the release button at the top of the control panel.
2. Remove the current battery by unplugging the battery strap.
3. Break off the 2 plastic battery retainer clips inside the battery compartment. Do this by grabbing each clip separately and wiggle back and forth and up and down until the plastic becomes weakened and breaks off.
4. Remove the protective tape from the single red wire coming out of the bottom of the rechargeable battery.
5. Attach the red wire to the Hardwire and Power Common + (positive) terminal on the control panel. See the figure in the next column.
6. Plug the 9 volt connector on the battery into the 9 volt connector on the control panel.
7. Place the battery in the battery compartment.

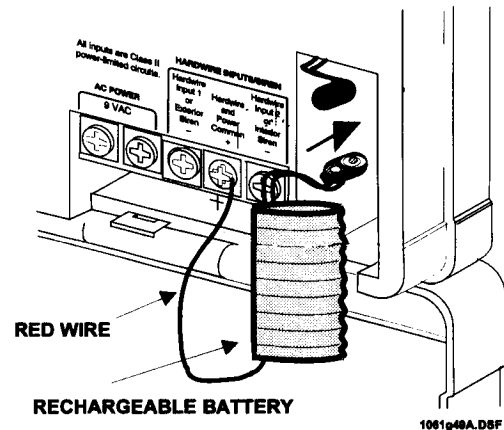

8. Close the control panel cover.
9. Plug the transformer into the power outlet.

## Specifications

Power source: 9.6 VDC at 280 milliamp hours batteries

4 hours of backup power (when fully charged)  
30 hours to fully charge

Typical battery life: 3-5 years (Not verified by UL)


Operating temperature range: 10° to 120° F

## FCC NOTICE

This device complies with FCC Rules Part 15. operation is subject to the following two conditions:

- 1) This may not cause harmful interference.
- 2) This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by Interactive Technologies, Inc. can void the user's authority to operate the equipment.



**INTERACTIVE TECHNOLOGIES, INC.**  
2266 SECOND STREET NORTH  
NORTH SAINT PAUL, MN 55109  
T: 651-777-2690  
F: 651-779-4890

WIRELESS

Security  
Automation  
Access Control